NAVAL POSTGRADUATE SCHOOL
Monterey, California

THESIS

A FURTHER COMPARISON OF DETERMINISTIC AND
STOCHASTIC LANCHESTER-TYPE COMBAT MODELS.

by

Kurt Dieter/Klemm

September 1980

Thesis Advisor: J. G. Taylor

Approved for public release; distribution unlimited

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO. AD-A093 606	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) A FURTHER COMPARISON OF DETERMINISTIC AND STOCHASTIC LANCHESTER-TYPE COMBAT MODELS		5. TYPE OF REPORT & PERIOD COVERED Master's Thesis; September 1980
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Kurt Dieter Klemm		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940		12. REPORT DATE September 1980
		13. NUMBER OF PAGES 87
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office) Naval Postgraduate School Monterey, California 93940		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Lanchester, Square-law Attrition, Stochastic, Combat Models, Bivariate Death Process

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)
This thesis examines the differences of deterministic and stochastic LANCHESTER-type combat models. Using an example of square-law attrition, solution methods and solutions are described. A new analytic solution for equal attrition rate coefficients is given. The numerical comparison includes hypotheses about the expected force levels and the variability in the expected force levels as a function of time, initial force levels, and breakpoint force levels.

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE
1 JAN 73
(Page 1)   S/N 0102-014-6601

A Further Comparison of Deterministic and Stochastic
Lanchester-Type Combat Models

by

Kurt Dieter Klemm
Captain, Army, Federal Republic of Germany
Ingenieur (grad.), Fachhochschule des Heeres 1, 1975

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN OPERATIONS RESEARCH

from the

NAVAL POSTGRADUATE SCHOOL
September 1980

Author _____

Approved by: _____
_____ Thesis Advisor

_____
Second Reader

_____
Chairman, Department of Operations Research

_____
Dean of Information and Policy Sciences

ABSTRACT

This thesis examines the differences of deterministic and stochastic LANCHESTER-type combat models. Using an example of square-law attrition, solution methods and solutions are described. A new analytic solution for equal attrition rate coefficients is given. The numerical comparison includes hypotheses about the expected force levels and the variability in the expected force levels as a function of time, initial force levels, and breakpoint force levels.

3

TABLE OF CONTENTS

4

LIST OF FIGURES

I. INTRODUCTION

Combat models are widely used as decision aids in the defense-
planning process, at least within the NATO alliance. Current operation-
al combat models are very complex because combat is a very complex
process. Unfortunately it is difficult (if not impossible) for the
beginner to understand the modelling approaches, concepts and motivation,
that may have been used to build such operational models. However, one
frequently considers a simple model as a paradigm for the development and
understanding of such complex models. This basic approach will be used
in this thesis to explore certain issues in the on-going debate about
the relative merits of stochastic and deterministic combat models.

A simple model is examined to explore differences between a determin-
istic and a stochastic approach to a certain type of analytical combat
model. As already mentioned, combat is a very complex process, but it
is also a complex <u>random</u> process, which can be supported by many examples
from military history. Analytical models are abstractions and very often
simplifications of reality. It seems to be a legitimate question to ask,
what effects the further abstraction of neglecting the randomness in
combat may have. At this moment, it should be pointed out that within
existing operational analytical models, both stochastic and deterministic
models are used.

Previous work done by SPRINGALL [9] and CLARK [4] evolved around
theoretical aspects. Their main concern was to give exact analytical
solutions and their proofs. CRAIG [5] started to explore the differences

6

between stochastic and deterministic models more from the numerical point of view, which will be continued in this thesis.

In the next chapter, a deterministic and stochastic version of a differential combat model will be described. The deterministic versions are well-known as LANCHESTER's equations of modern warfare, which were developed in 1914. Combat models, which model attrition from enemy action through a system of differential equations, are usually referred to as LANCHESTER-type models of warfare.

II. THE PARADIGM MODELS

A. THE DETERMINISTIC MODEL

First, LANCHESTER's equations of modern warfare will be briefly reviewed and some simple extensions given.

In 1914 LANCHESTER [7] hypothesized that under "modern conditions" in a combat between two homogeneous forces the firepower of the surviving weapons of one side can be concentrated on the surviving targets of the other side, so that each side's casualty rate is proportional to the number of enemy firers. This can be described by the following equations:

$$\frac{dx}{dt} = -ay \tag{2.1}$$

$$\frac{dy}{dt} = -bx \tag{2.2}$$

with initial conditions

$$X(0) = x_0 \tag{2.3}$$

$$Y(0) = y_0 \tag{2.4}$$

where a is the attrition rate with which the Y-force attrits the X-force, similarly for b. X_0 and Y_0 are the initial force levels and $X(t)$ and $Y(t)$ are the force levels at time t. The force levels, as a function of time t, can be written as

$$X(t) = x_0 \cosh(\sqrt{ab}\ t) - \sqrt{a/b}\ y_0 \sinh(\sqrt{ab}\ t) \tag{2.5}$$

$$Y(t) = y_0 \cosh(\sqrt{ab}\ t) - \sqrt{b/a}\ x_0 \sinh(\sqrt{ab}\ t) \tag{2.6}$$

The state equation relating initial force levels with force levels at some time t can be derived by dividing (2.1) by (2.2), separating

8

variables and integrating to yield

$$b(x_0{}^2-X(t)^2)=a(y_0{}^2-Y(t)^2).$$ (2.7)

This form of the state equation explains why this model is also referred to as the "square-law" attrition process. WEISS [11] has given a set of assumptions under which LANCHESTER's equations for modern warfare may apply:

A1.) Two homogeneous forces are engaged in combat. Every unit on a particular side has the same capabilities. The attrition rate may be different for the two forces.

A2.) Each unit on one side is within weapon range of all units on the other side.

A3.) The effects of successive rounds on the target are independent.

A4.) Each unit has perfect knowledge of target locations and fires only at live target (one at a time) killing them at a constant rate, which does not depend on the number of targets alive.

A5.) Fire is uniformly distributed over surviving targets.

The above model implies a fight until one force is annihilated. Therefore the model will be slightly changed by introducing the concept of unit breakpoints, X_{bp} and Y_{bp}, which are simply force levels at which the side, who reaches it first "breaks off" the engagement, leaving the other side as a winner. Also, to be more precise, it should be noted that negative force levels for breakpoints equal zero or force levels

9

less than nonzero breakpoints are impossible. So the deterministic LANCHESTER-type combat model with "square-law" attrition takes the following form:

$$\frac{dx}{dt} = \begin{cases} -ay & x_{bp} < X(t) \\ & y_{bp} < Y(t) \\ 0 & \text{otherwise} \end{cases} \qquad (2.8)$$

$$\frac{dy}{dt} = \begin{cases} -bx & x_{bp} < X(t) \\ & y_{bp} < Y(t) \\ 0 & \text{otherwise} \end{cases} \qquad (2.9)$$

with initial conditions

$$X(0) = x_0 \qquad (2.10)$$

$$Y(0) = y_0 \qquad (2.11)$$

The model in this form, equations (2.8) through (2.11), was used for comparisons throughout the thesis.

B. THE STOCHASTIC MODEL

There are several ways to include random variations in LANCHESTER-type models. These are:

* The attrition rate coefficients may be random variables.

* The enemy's initial force level may be a random variable, weakening the assumption of perfect knowledge.

* The breakpoints may be random variables.

* The casualty rate is fixed, but the occurrence of casualties over time may be random.

The only random variation considered here will be the random occurrence of casualties over time. Another specification was to choose a

10

model similar to the "square-law" attrition in order to allow comparisons. In other words, the question to be asked is "how do random fluctuations in the occurrence of casualties modify the deterministic results of the square-law attrition process?"

The approach used here was a continuous parameter MARKOV chain model, where the time t varies continuously and the number of combatants on each side is a non-negative integer. Let $M(t)$ be the size of the X-force at time t with a particular state value m. Let $N(t)$ be the size of the Y-force at time t with a particular state value n. Let m_0 and n_0 be the initial force levels and m_{bp}, n_{bp} be the breakpoint force levels of X and Y respectively. Fig. 1 shows the state space of this MARKOV chain model. Note that at a given time t, any state is described by the two force levels of the X and Y force. As each side loses units due to attrition and no replacements are allowed, it is easy to understand why BILLARD [1] referred to this type of process as a "bivariate death process."

11
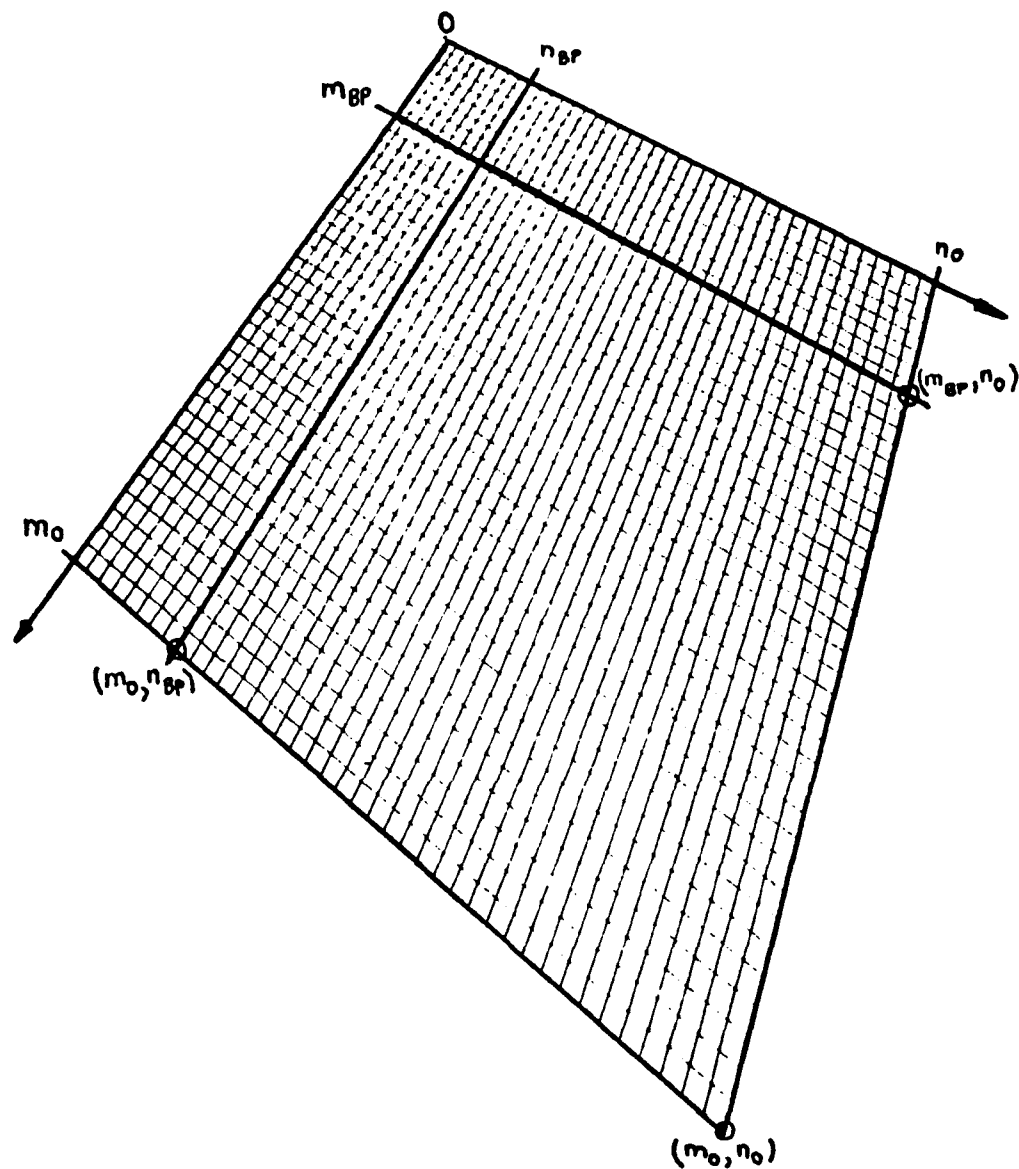
Figure 1 – STATE SPACE OF THE MARKOV CHAIN MODEL

For the description of the stochastic square-law attrition process corresponding to the two deterministic differential equations (2.8) and (2.9), a system of many differential equations, depending on the battle termination model, is required. This system will be given for a fixed-force-level-breakpoint battle with square-law attrition.

The following assumptions yield the stochastic square-law attrition process.

A1.) The attrition process depends only on the current system state and time and not on the past history (this assumption is usually referred to as markovian property).

A2.) The probability $P\left(\begin{array}{l}\text{one x casualty during the}\\\text{time interval t to t+h}\end{array}\right) = ah$

A3.) The probability $P\left(\begin{array}{l}\text{one y casualty during the}\\\text{time interval t to t+h}\end{array}\right) = bh$

A4.) The probability of more than one casualty occurring in the time interval t to t+h is of the order of magnitude $o(h)$, where $\lim_{h\to 0} o(h)/h = 0$.

A5.) No more casualties can occur once $m = m_{bp}$ or $n = n_{bp}$.

Making the time interval h infinitesimally small, the following set of forward CHAPMAN-KOLMOGOROV equations can be developed. Let $P(t,m,n)$ be the probability that the system is in state (m,n) at a time t. For convenience each equation is related to a region in the state space shown in Fig. 2.

13

For $m = m_0$ and $n = n_0$, Region I

$$\frac{dP}{dt}(t, m_0, n_0) = -(an_0 + bm_0)\, P(t, m_0, n_0) \qquad (2.12)$$

for $m_{bp} < m < m_0$ and $n = n_0$, Region II

$$\frac{dP}{dt}(t, m, n_0) = an_0\, P(t, m+1, n_0) - (an_0 + bm)\, P(t, m, n_0) \quad (2.13)$$

for $n_{bp} < n < n_0$ and $m = m_0$, Region III

$$\frac{dP}{dt}(t, m_0, n) = bm_0\, P(t, m_0, n+1) - (an + bm_0)\, P(t, m_0 n) \quad (2.14)$$

for $m_{bp} < m < m_0$ and $n_{bp} < n < n_0$, Region IV

$$\frac{dP}{dt}(t, m, n) = anP(t, m+1, n) + bmP(t, m, n+1) - (an + bm)P(t, m, n)$$
$$(2.15)$$

for $m = m_{bp}$ and $n_{bp} < n < n_0$, Region V

$$\frac{dP}{dt}(t, m_{bp}, n) = anP(t, m_{bp}+1, n) \qquad (2.16)$$

for $n = n_{bp}$ and $m_{bp} < m < m_0$, Region VI

$$\frac{dP}{dt}(t, m, n_{bp}) = bmP(t, m, n_{bp}+1) \qquad (2.17)$$

for $m = m_{bp}$ and $n = n_{bp}$, Region VII

$$P(t, m_{bp}, n_{bp}) = 0 \text{ for all } t \qquad (2.18)$$

because of the definition of a breakpoint force level. The initial condition is

$$P(0, m_0, n_0) = 1.0 \qquad (2.19)$$

14
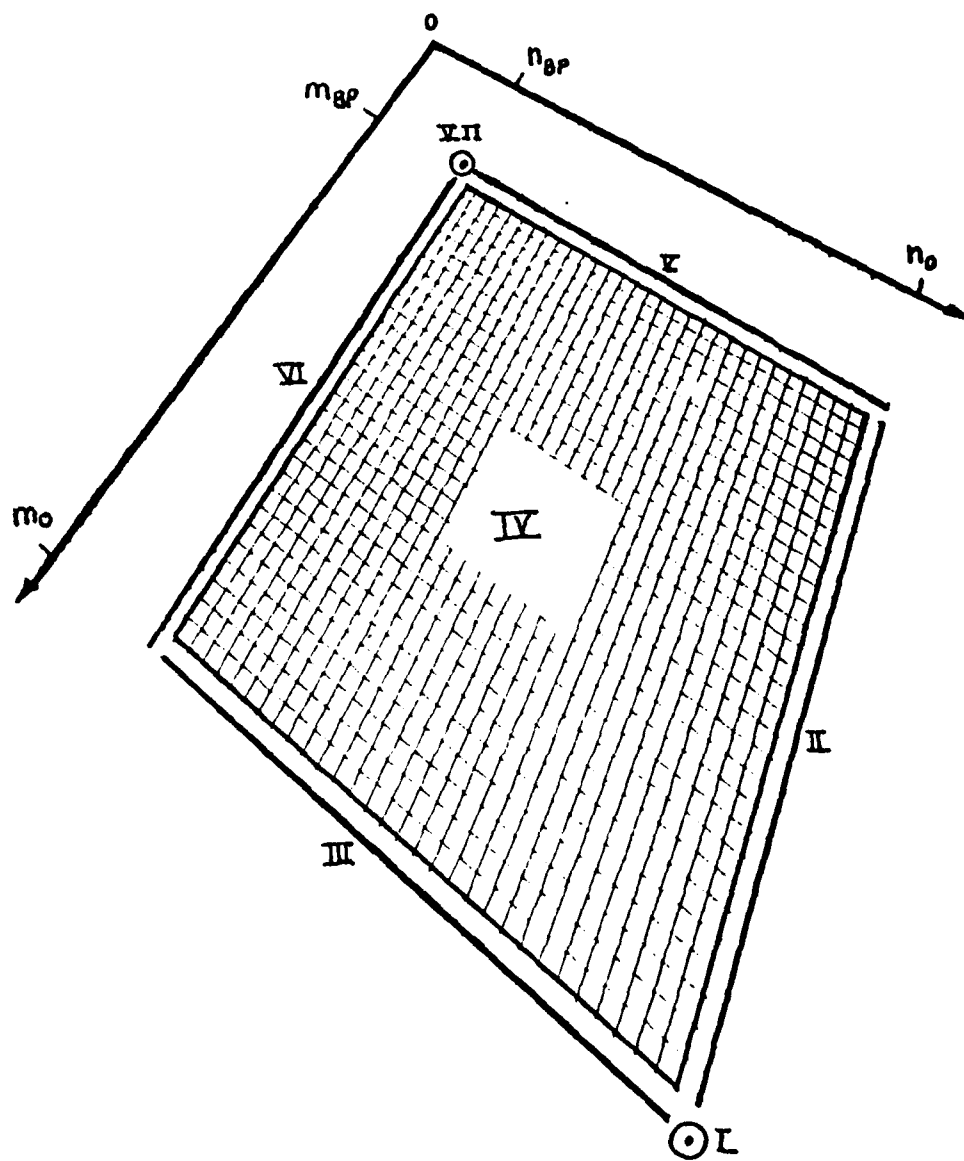
Figure 2 - REGIONS IN THE STATE SPACE

As $P(t,m,n)$ is a joint probability distribution, the following must also be true

$$0 \leq P(t,m,n) \leq 1.0 \tag{2.20}$$

and

$$\sum_{m=m_{bp}}^{m_0} \sum_{n=n_{bp}}^{n_0} P(t,m,n) = 1.0 \tag{2.21}$$

16

III. SOLVING THE DIFFERENTIAL EQUATIONS

A. SOLUTIONS FOR THE DETERMINISTIC MODEL

Force levels as a function of time were already given in equations
(2.5) and (2.6). It is relatively easy to obtain analytical solutions
for such simple deterministic models as described before. On the other
hand, it is necessary to point out that for models with any degree of
operational realism, analytical methods for solving the differential
equations are usually not available. Therefore, some numerical method
with a digital computer is usually used. TAYLOR [10] has summarized in
his Appendix C the most widely used numerical methods, a discussion of
which seems unnecessary at this point.

B. SOLUTIONS TO THE STOCHASTIC MODEL

Even for this relatively simple stochastic model with fixed force
level breakpoints, which are usually nonzero, a complete set of general
analytical solutions for the differential equations (2.12) through (2.19)
has not been found. On the other side, given some minor restrictions
like a fight to the finish or equal attrition rate coefficients, solu-
tions, or at least solution methods have been proposed which will be
briefly discussed in the next section.

First, the method for getting the state probabilities used here will
be described. Numerical solutions were obtained using the fourth-order
RUNGE-KUTTA method, which is probably one of the best known finite dif-
ference approximations to ordinary differential equations (next to the

17

EULER-CAUCHY-method). To increase the accuracy of the overall solutions

analytical results for certain regions of the state space were substituted.

These analytical solutions will be stated now. For region I, i.e. no

casualties on either side, the solution to (2.12) is

$$P(t, m_0, n_0) = \exp\ -(a n_0 + b m_0) t \qquad (3.1)$$

which can be derived by the standard method used for this kind of dif-

ferential equation. For the boundary cases, region II and III, i.e.

one of the two sides has not yet had a casualty, TAYLOR [10] has given

the analytical expression as

for $m_{bp} < m < m_0$ and $n = n_0$, Region II

$$P(t, m, n_0) = \frac{1}{J!} \left\{ a n_0 / b (e^{bt} - 1) \right\}^J \exp(-(b m_0 + a n_0) t) , \qquad (3.2)$$

where $J = m_0 - m$

for $n_{bp} < n < n_0$ and $m = m_0$, Region III

$$P(t, m_0, n) = \frac{1}{K!} \left\{ b m_0 / a (e^{at} - 1) \right\}^K \exp(-(b m_0 + a n_0) t) , \qquad (3.3)$$

where $K = n_0 - n$.

These two equations (3.2) and (3.3) were obtained by
recursively solving equations (2.12), (2.13) and (2.14) "from
the top down."

C. OTHER ANALYTICAL SOLUTIONS

The solutions or solution methods for getting the state

probabilities will only be stated for the square-law attri-

tion process. Only two were used for the numerical work for

this thesis.

Apparently, one of the "oldest" analytic solutions was given by BROWN [3] in 1955 for the general stochastic LANCHESTER-type combat model with time independent attrition rates. His approach and solution will be briefly outlined for square-law attrition. Consider a path from state (m_0, n_0) to some state (m,n). This path can be described as a sequence of $J = (m_0 - m)$ zeros and $K = (n_0 - n)$ ones, where a zero corresponds to an X casualty and a one to a Y casualty. Using the binary representation of a positive integer, one can define to each realization of a battle path an integer k given by

$$k = d_{k,1} d_{k,2} \cdots d_{k,J+K}$$

where $d_{k,r} = 1$ if the r^{th} casualty along a battle path corresponding to k is a Y casualty and $d_{k,r} = 0$ otherwise. Also let $I_{J,K}$ be the set of all positive integers whose binary representation contains exactly K ones and J zeros. Then

$$m_{k,r} = m_0 - r + \sum_{j=1}^{r} d_{k,j}$$

$$n_{k,r} = n_0 - \sum_{j=1}^{r} d_{k,j}.$$

Then BROWN [3] has shown that

$$P(t,m,n) = \frac{1}{2\pi} \sum_{k \in I_{J,K}} \int_{-\infty}^{\infty} \prod_{r=0}^{J+K-1} K_{k,r}$$

$$\cdot \frac{\exp(-iut)-\exp(-tl(m_{k,r},n_{k,r}))}{l(m_{k,r},n_{k,r})-iu} \quad du \quad , \quad (3.4)$$

where $i = \sqrt{-1}$,

$\quad l(m,n) = an+bm,$

$$K_{k,r} = \frac{g_{k,r+1}}{1-iu/l(m_{k,r},n_{k,r})}$$

and

$$g_{k,r+1} = d_{k,r+1}an_{k,r}+(1-d_{k,r+1})bm_{k,r} \, .$$

There was no indication that nonzero breakpoints were excluded. A discussion of this solution follows in the next section.

About 14 years later, in 1969, CLARK [4] proposed another approach which TAYLOR [10] called a "hybrid analytical-numerical" method. The restriction is that the breakpoints have to be zero, i.e. it is a fight to the finish. Although proposed for a general time independent attrition function, this approach will be outlined for "square-law" attrition. Then according to CLARK [4] the state probabilities are given by

for $0 < m \leq m_0$ and $0 < n \leq n_0$

$$P(t,m,n) = \sum_{j=m}^{m_0} \sum_{k=n}^{n_0} C_{j,k}^{m,n} \cdot \exp\left(-(ak+bj)t\right) \quad , \text{ (3.5)}$$

for $0 < m \leq m_0$ and $n=0$

$$P(t,m,0) = C_{0,0}^{m,0} + \sum_{j=m}^{m_0} \sum_{k=1}^{n_0} C_{j,k}^{m,0} \cdot \exp\left(-(ak+bj)t\right), \text{ (3.6)}$$

for $m=0$ and $0 < n \leq n_0$

$$P(t,0,n) = C_{0,0}^{0,n} + \sum_{j=m}^{m_0} \sum_{k=1}^{n_0} C_{j,k}^{0,n} \cdot \exp\left(-(ak+bj)t\right), \text{ (3.7)}$$

and at last there is to remember that $P(t,0,0) = 0$ for all times t. The constants $C_{j,k}^{m,n}$ are determined by a system of partial difference equations.

For $0 < m < j \leq m_0$ and $0 < n < k \leq n_0$

$$C_{j,k}^{m,n} = \frac{an\ C_{j,k}^{m+1,n} + bm\ C_{j,k}^{m,n+1}}{a(n-k)+b(m-j)} \quad , \text{ (3.8)}$$

for $0<m<j\leq m_0$ and $0<n=k\leq n_0$

$$C_{j,n}^{m,n} = \frac{an\ C_{j,n}^{m+1,n}}{b(m-j)}$$, (3.9)

for $0<m=j\leq m_0$ and $0<n<k\leq n_0$

$$C_{m,k}^{m,n} = \frac{bm\ C_{m,k}^{m,n+1}}{a(n-k)}$$, (3.10)

for $0<m=j\leq m_0$ and $0<n=k\leq n_0$

but $(m,n) \neq (m_0,n_0)$

$$C_{m,n}^{m,n} = -\sum_{j=m}^{m_0}\ \sum_{k=n+1}^{m_0} C_{j,k}^{m,n}\ -\sum_{j=m+1}^{m_0}\ C_{j,k}^{m,n}$$, (3.11)

with $C_{m_0,n_0}^{m_0,n_0} = 1.0.$

Also for $0 < m \leq j \leq m_0$ and $0 = n < k \leq n_0$

$$c_{j,k}^{m,0} = -\frac{bm\, c_{j,k}^{m,1}}{ak+bj} \quad , \quad (3.12)$$

similarly for $0 = m < j \leq m_0$ and $0 < n \leq k \leq n_0$

$$c_{j,k}^{0,n} = -\frac{an\, c_{j,k}^{1,n}}{ak+bj} \quad . \quad (3.13)$$

Then for $1 \leq m \leq m_0$

$$c_{0,0}^{m,0} = -\sum_{j=m}^{m_0} \sum_{k=1}^{n_0} c_{j,k}^{m,0} \quad , \quad (3.14)$$

and finally for $1 \leq n \leq n_0$

$$c_{0,0}^{0,n} = -\sum_{j=1}^{m_0} \sum_{k=n}^{n_0} c_{j,k}^{0,n} \quad . \quad (3.15)$$

Though having the publishing date of 1979, the next approach was published in June 1980 by BILLARD [1]. She considered the LANCHESTER-type square-law attrition combat model as a pure death-process and applied SEVERO's [8] recursive theorem for solving differential equations. As before, only a fight to the finish has been considered.

23

The first step is to identify each point (m,n) in the state space by a counting coordinate k, where

$$k = (m_0+1)(n_0+1)$$

$$-m(n_0+1)-n \qquad . \qquad (3.16)$$

Then

$$P[t,m,n] = P[t,k] \qquad (3.17)$$

and the differential equations (2.12) through (2.18) take on a slightly different form. As an example, (2.15) will be given by

$$\frac{dP}{dt}(t,k) = anP[t,k-n_0-1]+bmP[t,k-1]$$
$$-(an+bm)P[t,k] \qquad . \qquad (3.18)$$

The whole set of differential equations was then expressed in matrix terms as

$$\frac{d}{dt}\underline{P}(t) = \underline{B}\underline{P}(t) \qquad (3.19)$$

with a solution given as

$$\underline{P}(t) = \underline{C}\underline{e}(t) \qquad (3.20)$$

where $\underline{e}(t)$ is the $(m_0+1)(n_0+1) \times 1$ -vector with elements $\exp(b_k t)$ with b_k being the k^{th} diagonal element of the matrix $\underline{B}$. The matrix $\underline{B}$ can be partitioned into submatrices, whose m-coordinate is common, due to the ordering defined by the counting coordinate k (Equation 3.16).

Then

$$\underline{B} = (\underline{b}_{uv}), \quad u,v = 1,2\ldots m_0+1$$

where the submatrices $\underline{b}_{uv}$ have the elements

$$\underline{b}_{uv} = (b_{uv}(p,q)), \quad p,q = 1,2\ldots n_0+1.$$

So the matrix $\underline{B}$ has the elements

$$b_{uu}(p,p) = -a(n_0-p+1)-b(m_0-u+1)$$

$$\text{for } u = 1,2\ldots m_0 \text{ and } p = 1,2\ldots n_0$$

$$b_{uu}(p,p-1) = b(m_0-u+1) \text{ for } u = 1,2\ldots m_0+1$$

$$p = 2,3\ldots n_0+1$$

and

$$b_{u,u-1}(p,p) = a(n_0-p+1) \text{ for } u = 2,3\ldots m_0+1$$

$$P = 1,2\ldots n_0+1.$$

All other elements are zero.

Thus, the matrix $\underline{B}$ has at most 3 nonzero entries per row or column. The matrix $\underline{C}$ can be partitioned in the same way. Then using SEVERO's [8] theorem and the special form of the matrix $\underline{B}$, only a part of the $\underline{C}$-matrix needs to be determined. This part will be omitted here, but the final result will be given by

$$P(t,k) = \sum_{j=1}^{k} c(k,j)\cdot\exp(b_j t) \qquad (3.21)$$

where $c(k,j)$ is the $(k,j)^{th}$ element of the solution matrix $\underline{C}$.

The previous two approaches have required that the force level breakpoints be zero. Now, a result will be given whose restriction is that the attrition rate coefficients be equal, but nonzero breakpoints are allowed. For further reference it will be called the Equal-Attrition-Rate-Coefficient-Solution (EARCS).

25

Let $a = b = f$.

For $m_{bp} < m \leq m_0$ and $n_{bp} < n \leq n_0$

$$P(t,m,n) = \frac{C(m,n)}{(m_0+n_0-m-n)!}$$

$$\cdot (1-e^{-ft})^{m_0+n_0-m-n} \qquad \cdot \exp(-f(m+n)t) \qquad (3.22)$$

for $m = m_{bp}$ and $n_{bp} < n \leq n_0$

$$P(t,m_{bp},n) = \frac{fn \quad C(m_{bp}+1,n)}{J!} \cdot$$

$$\cdot \sum_{k=0}^{J} (-1)^k \binom{J}{k} \left\{ \frac{1-\exp\left(-ft(m_{bp}+1+n+k)\right)}{f(m_{bp}+1+n+k)} \right\}, \qquad (2.23)$$

where $J = m_0+n_0-m_{bp}-1-n$

for $n = n_{bp}$ and $m_{bp} < m \leq m_0$

$$P(t,m,n_{bp}) = \frac{fm \quad C(m,n_{bp}+1)}{K!}$$

$$\cdot \sum_{j=0}^{K} (-1)^j \binom{K}{j} \left\{ \frac{1-\exp\left(-ft(m+1+n_{bp}+j)\right)}{f(m+1+n_{bp}+j)} \right\}, \qquad (3.24)$$

where $K = m_0+n_0-m-n_{bp}-1$.

The coefficients $C(m,n)$ satisfy for $m_{bp} < m < m_0$ and $n_{bp} < n < n_0$ the following partial difference equation

$$C(m,n) = nC(m+1,n) + mC(m,n+1) \qquad (3.25)$$

with the boundary conditions

$$C(m,n_0) = (n_0)^{m_0-m} \text{ for } m_{bp} < m \leq m_0$$

and

$$C(m_0,n) = (m_0)^{n_0-n} \text{ for } n_{bp} < n \leq n_0$$

This result has been developed using a method verbally pro-
posed by TAYLOR. The method will now be outlined. ISBELL
and MARLOW [6] described a stochastic LANCHESTER-type attri-
tion process with a different attrition function. Instead of
the attrition of one force being proportional to the number of
of enemies of the opposing force as in the square-law attri-
tion (e.g. for the attrition of the M-force let

$$A(m,n) = an$$

be the attrition rate and

$$B(m,n) = bm$$

the attrition rate for the N-force with square-law attrition),
their attrition rates looked like

$$A(m,n) = an+cm$$

and

$$B(m,n) = bm+dn$$

with the restriction that

$$a+c = b+d.$$

But with $c=d=0$ and $a=b=f$ we are back to square-law attrition.
This leads to equations (3.22) and (3.25). Equations (3.23)
and (3.24) were derived in the following way (e.g. for 3.23).
Solving equation (3.22) for $m = m_{bp}+1$ yields

27

$$P(t, m_{bp}, n) = \frac{C(m_{bp}+1, n)}{(m_0+n_0-m_{bp}-1-n)!} \cdot \exp\left(-ft(m_{bp}+1+n)\right)$$

$$\cdot (1-e^{-ft})^{m_0+n_0-m_{bp}-1-n} \tag{3.26}$$

substituting for the second factor its BINOMIAL expansion

$$(1-e^{-ft})^J = \sum_{k=0}^{J} (-1)^k \binom{J}{k} e^{-ftk}(1)^{J-k}$$

with $J = m_0+n_0-m_{bp}-1$ and multiplying through by the third factor. Then using equation (2.16), the differential equation for $m = m_{bp}$ and $n_{bp} < n \le n_0$, and substituting equation (3.26) into the extended form, it can now easily be integrated to yield equation (3.23).

D. DISCUSSION

In the discussion of the analytical solutions outlined in the last section, there is one important point. BROWN [3] himself points out that unless m is close to m_0 and n is close to n_0 his result (equation (3.4)) is of "little practical interest." Most of the analytical solutions, especially for more general LANCHESTER-type models, have little more than "symbolic" character. BROWN's solution is a good example of that.

In comparing the solutions given by BILLARD [2] and CLARK [4], this author has the feeling that both solutions are equivalent and only the representation is different. This

intuitive guess needs verification. It may be concidence that CLARK [4] and SEVERO [8] published their work in the same year.

The last presented solution (equation (3.22) through (3.24)) seems to be relatively handy for use on a computer. It has a big advantage over numerical solution methods other than its accuracy, because it is an exact result. Like CLARK's method, the coefficients have to be calculated only once for a given set of input data. Then, to get the state probabilities for a certain point in time you have to make only one set of calculations, as opposed to the numerical methods where one has to go from time $t = 0$ to time $t = t$ in small time steps and then have only an approximate result.

E. IMPORTANCE OF THE STATE PROBABILITIES

The state probabilities as a function of time are the key to calculating several quantities of interest. These are expected force levels as a function of time, variances and standard deviations in the force levels and also the probability of winning. These quantities are necessary to legitimately compare the stochastic with the deterministic results.

To get at least a feeling of how the state probabilities evolve over time, the joint probability distribution will be presented in a 3-D-picture. It is indeed surprising that more use has not been made of computer graphics to

29

investigate the dynamics of a stochastic LANCHESTER-type combat model. Table 1 gives the data used for the next five figures. These figures may be thought of as "snapshots" of the joint probability for the survivors in this battle taken at a sequence of increasing times.

TABLE 1

Data for the Numerical Example 1

Force Levels $m_0 = 40$ $m_{bp} = 0$

                          $n_0 = 40$ $n_{bp} = 0$

Attrition Rates $a = 0.008$ M casualties per minute and N firer

                          $b = 0.004$ N casualties per minute and M firer

At Times $t_1 = 0.025 \, t_f$

                          $t_2 = 0.250 \, t_f$

                          $t_3 = 0.500 \, t_f$

                          $t_4 = 0.750 \, t_f$

                          $t_5 = 1.000 \, t_f$

where $t_f = 155.81$ minutes is the time a deterministic battle with the same force levels and unit breakpoints ends, i.e.
$x(t_f) = 0.0$ and $y(t_f) = 28.28$

Figure 3 - FLOT OF JOINT PROBABILITIES P(t,m,n)

with data according to Table 1

32

Figure 4 – PLOT OF JOINT PROBABILITIES P(t,m,n)

with data according to Table 1

33

Figure 5 - PLOT OF JOINT PROBABILITIES P(t,m,n)

with data according to Table 1

34

Figure 6 - PLOT OF JOINT PROBABILITIES P(t,m,n)

with data according to Table 1

35

figure 7 - PLOT OF JOINT PROBABILITIES P(t,m,n)

with data according to Table 1

At the time t = 0 all probability is located at (m_0, n_0) in the state space (Region I). As time passes, the probability mass is distributed over more states, with the mode moving away from the diagonal towards the winning side. All points in the state space with breakpoints, i.e. (m_{bp}, n) and (m, n_{bp}) for all m and n, are absorbing states, probability mass is absorbed in that states. The sum of probability mass in Region V (see Fig. 2) represents the probability, that the N-force wins at that given time, in Region VI that the M-force wins.

The next five figures show a similar sequence of plots for the joint probability P(t,m,n) for the force levels M(t) and N(t). The data is explained in Table 2. Note the small differences because of the nonzero force level breakpoints. Probability mass having reached the breakpoint "piles" up there. The state space is reduced by the fixed force level breakpoints, but the probability distribution evolves basically in the same qualitative manner as in the previous example.

TABLE 2

Data for the Numerical Example 2

Force Levels $\quad\quad\quad\quad$ $m_0 = 40$ $\quad\quad$ $m_{bp} = 8$

$\quad\quad\quad\quad\quad\quad\quad\quad$ $n_0 = 40$ $\quad\quad$ $n_{bp} = 8$

Attrition Rates $\quad\quad\quad$ $a = 0.008$ $\quad$ M casualties per
$\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad$ minute and N firer

$\quad\quad\quad\quad\quad\quad\quad\quad\quad$ $b = 0.004$ $\quad$ N casualties per
$\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad\quad$ minute and M firer

At Times $\quad\quad\quad\quad\quad$ $t_1 = 0.025\ t_f$

$\quad\quad\quad\quad\quad\quad\quad\quad\quad$ $t_2 = 0.250\ t_f$

$\quad\quad\quad\quad\quad\quad\quad\quad\quad$ $t_3 = 0.500\ t_f$

$\quad\quad\quad\quad\quad\quad\quad\quad\quad$ $t_4 = 0.750\ t_f$

$\quad\quad\quad\quad\quad\quad\quad\quad\quad$ $t_5 = 1.000\ t_f$

where t_f = 120.68 minutes is the time a
deterministic battle with the same force
levels and unit breakpoints ends, i.e.
$x(t_f) = 8.0$ and $y(t_f) = 28.83$
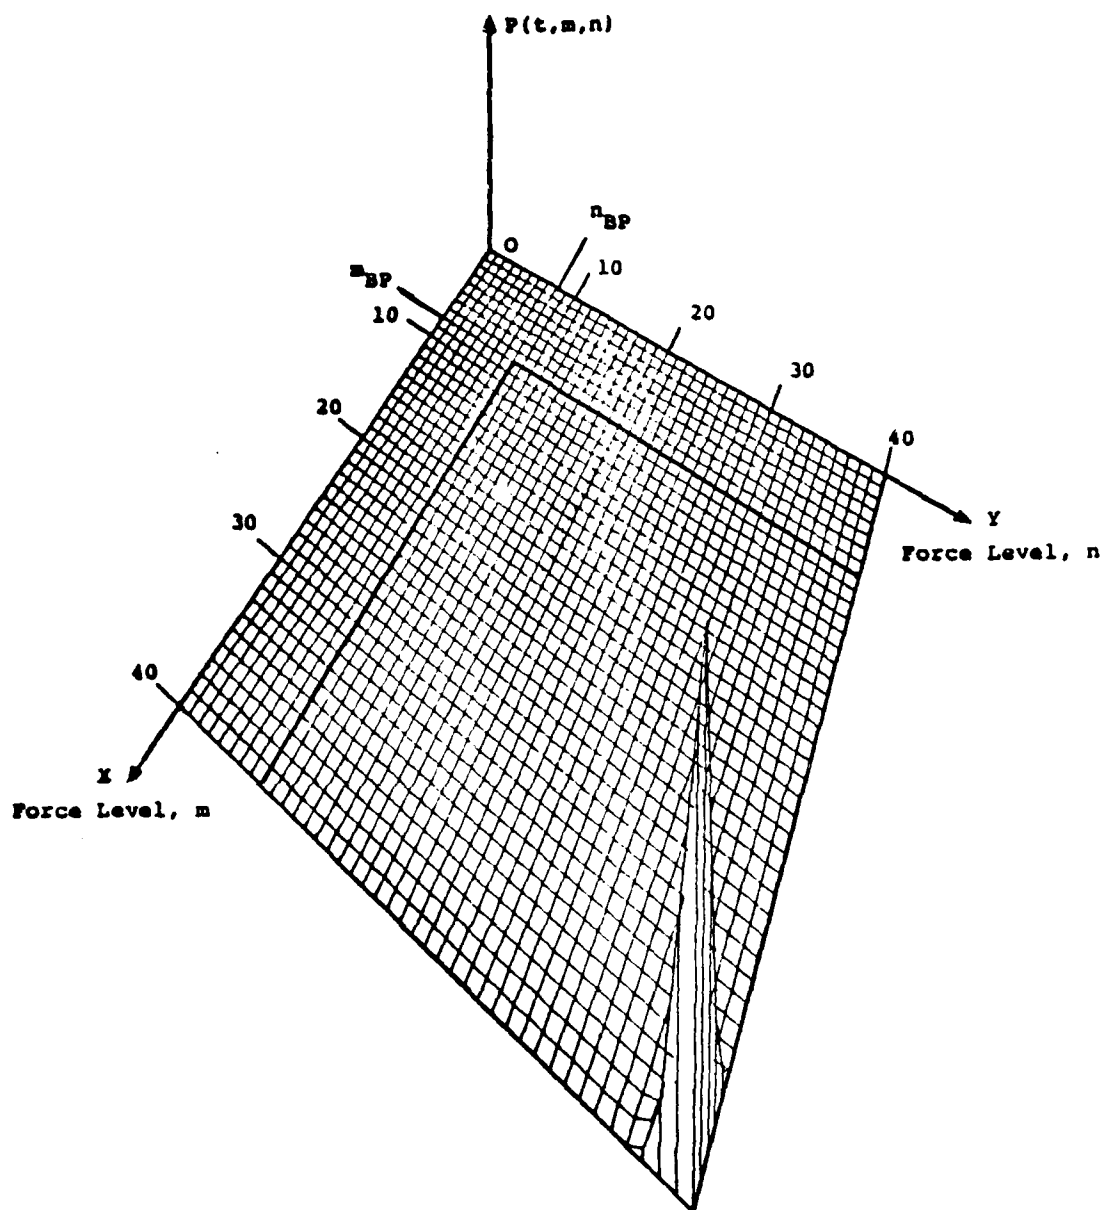
Figure 8 - PLOT OF JOINT PROBABILITIES P(t,m,n)

with data according to Table 2

39
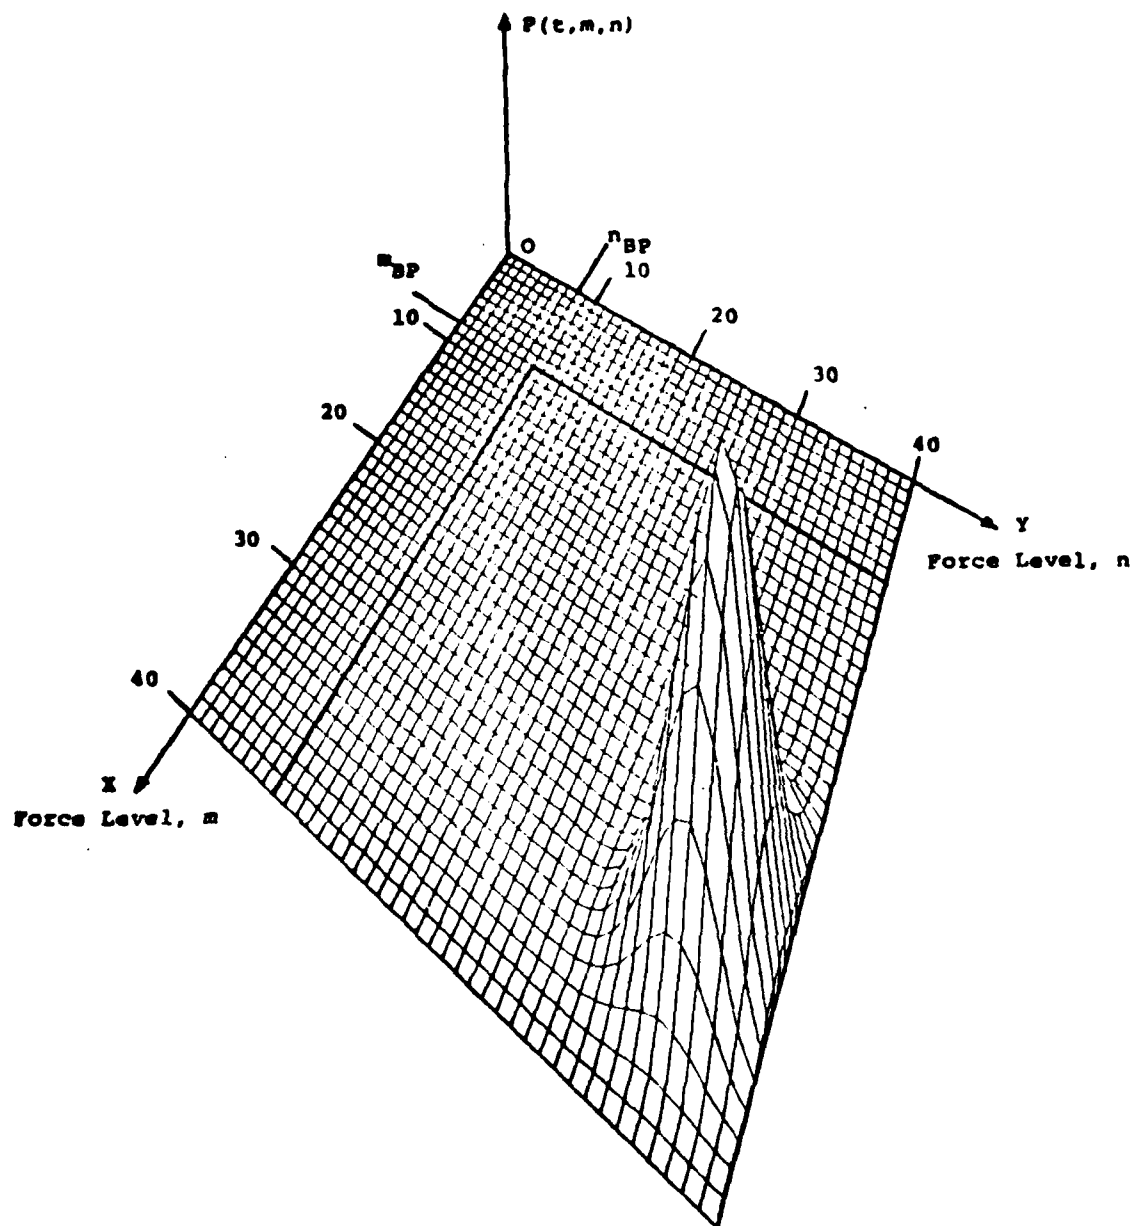
Figure 9 - PLOT OF JOINT PROBABILITIES P(t,m,n)
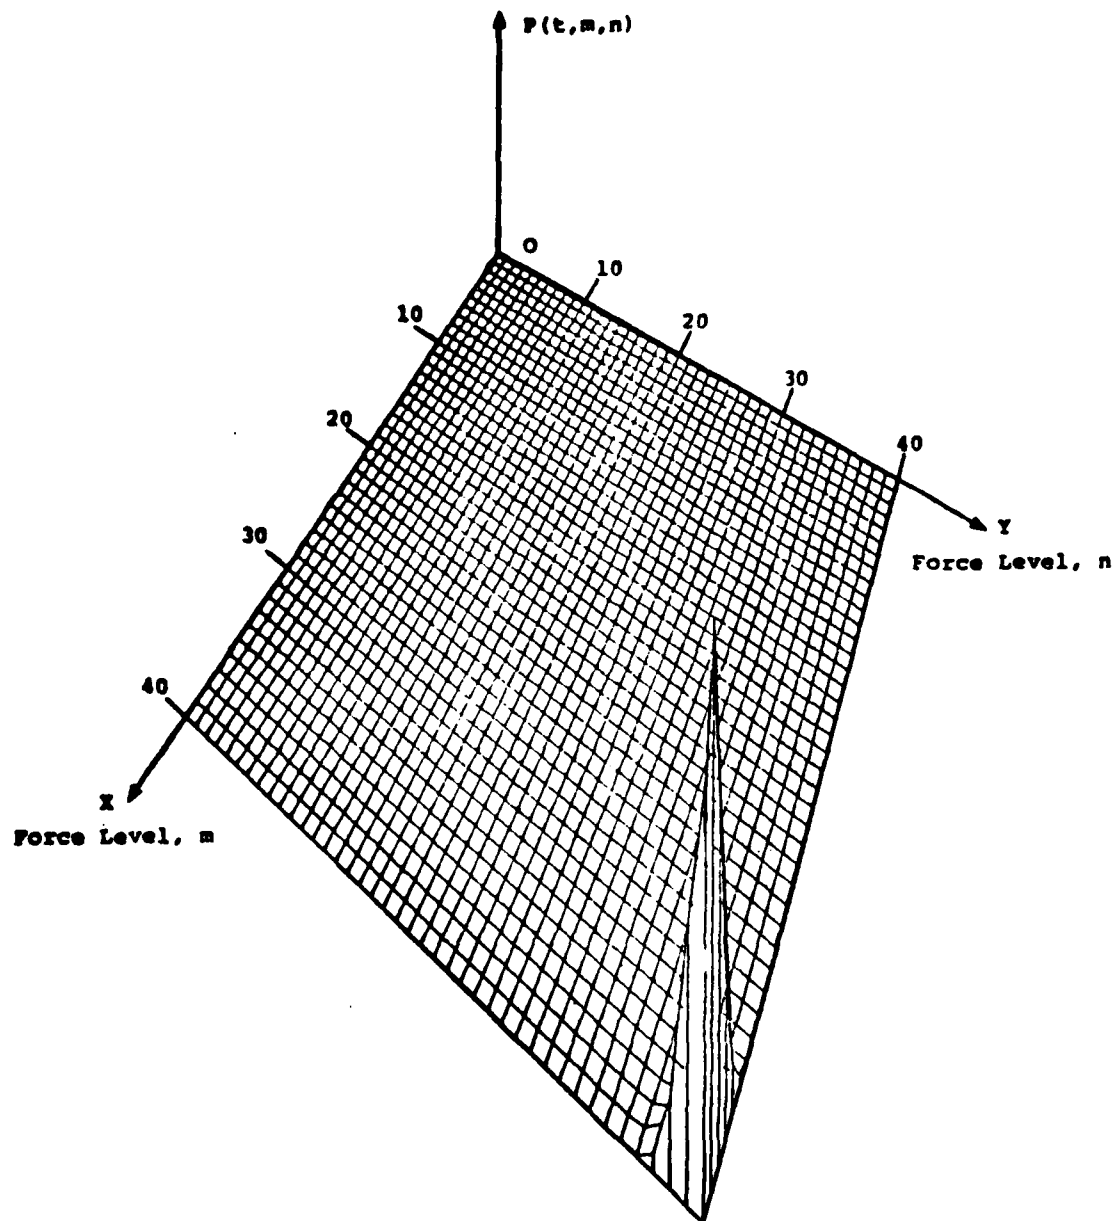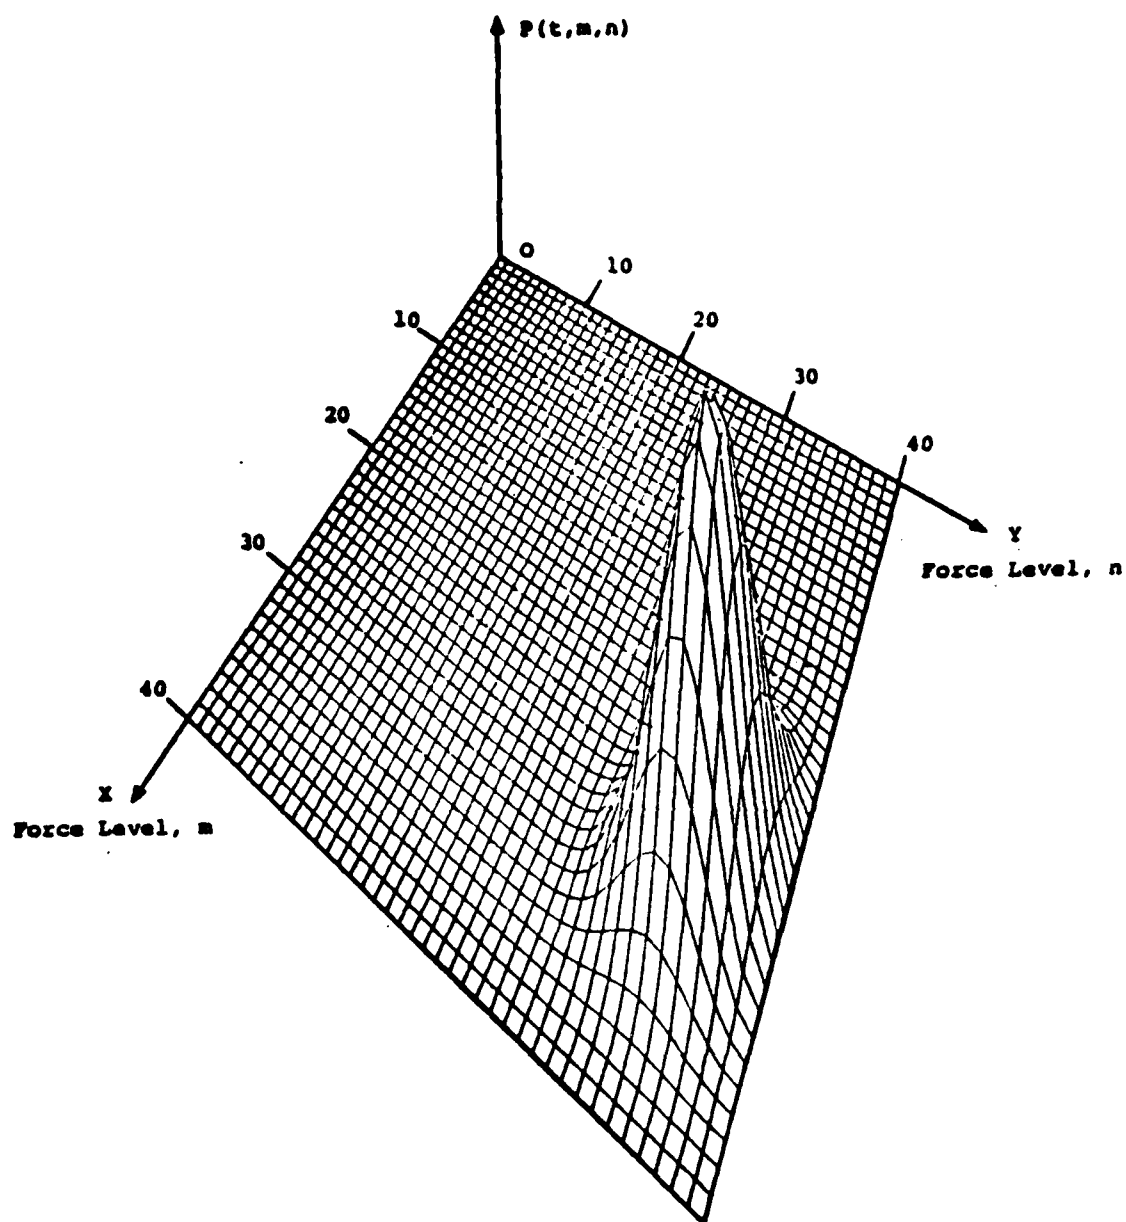**with data according to Table 2**

40
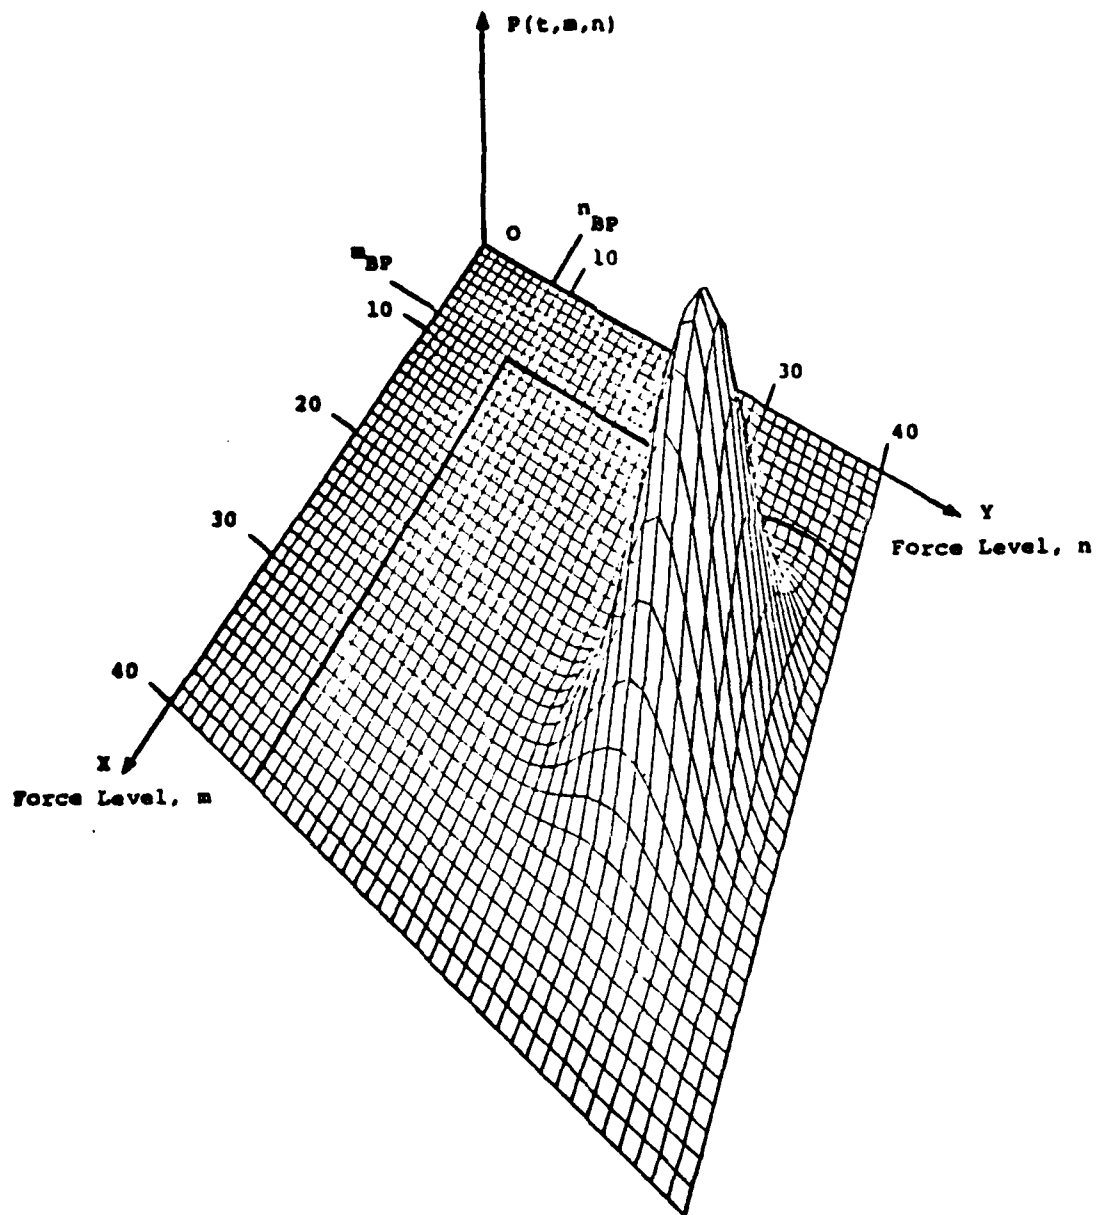
Figure 10 - PLOT OF JOINT PROBABILITIES P(t,m,n)

with data according to Table 2
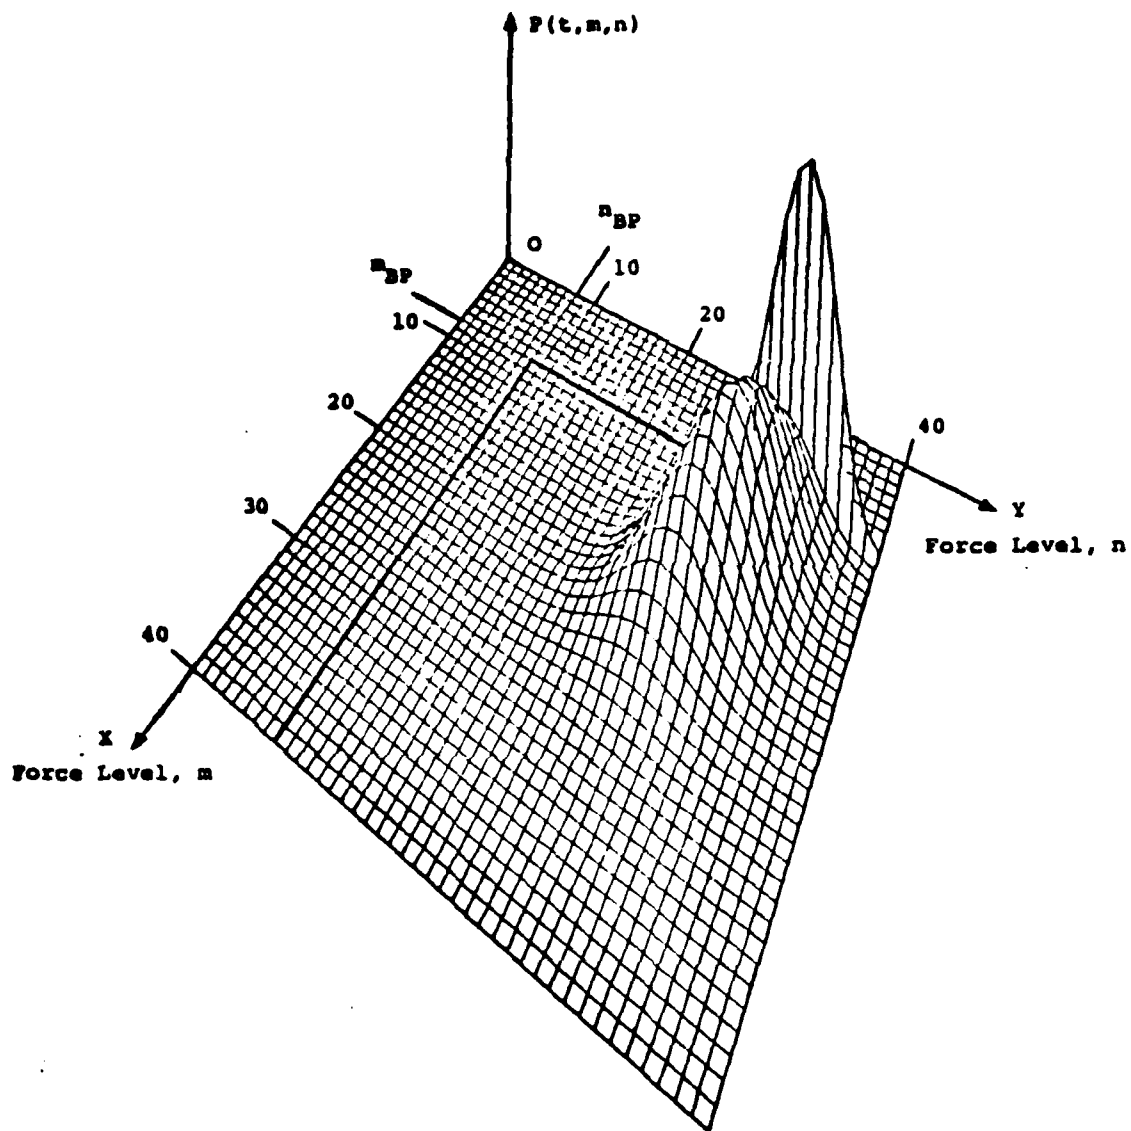
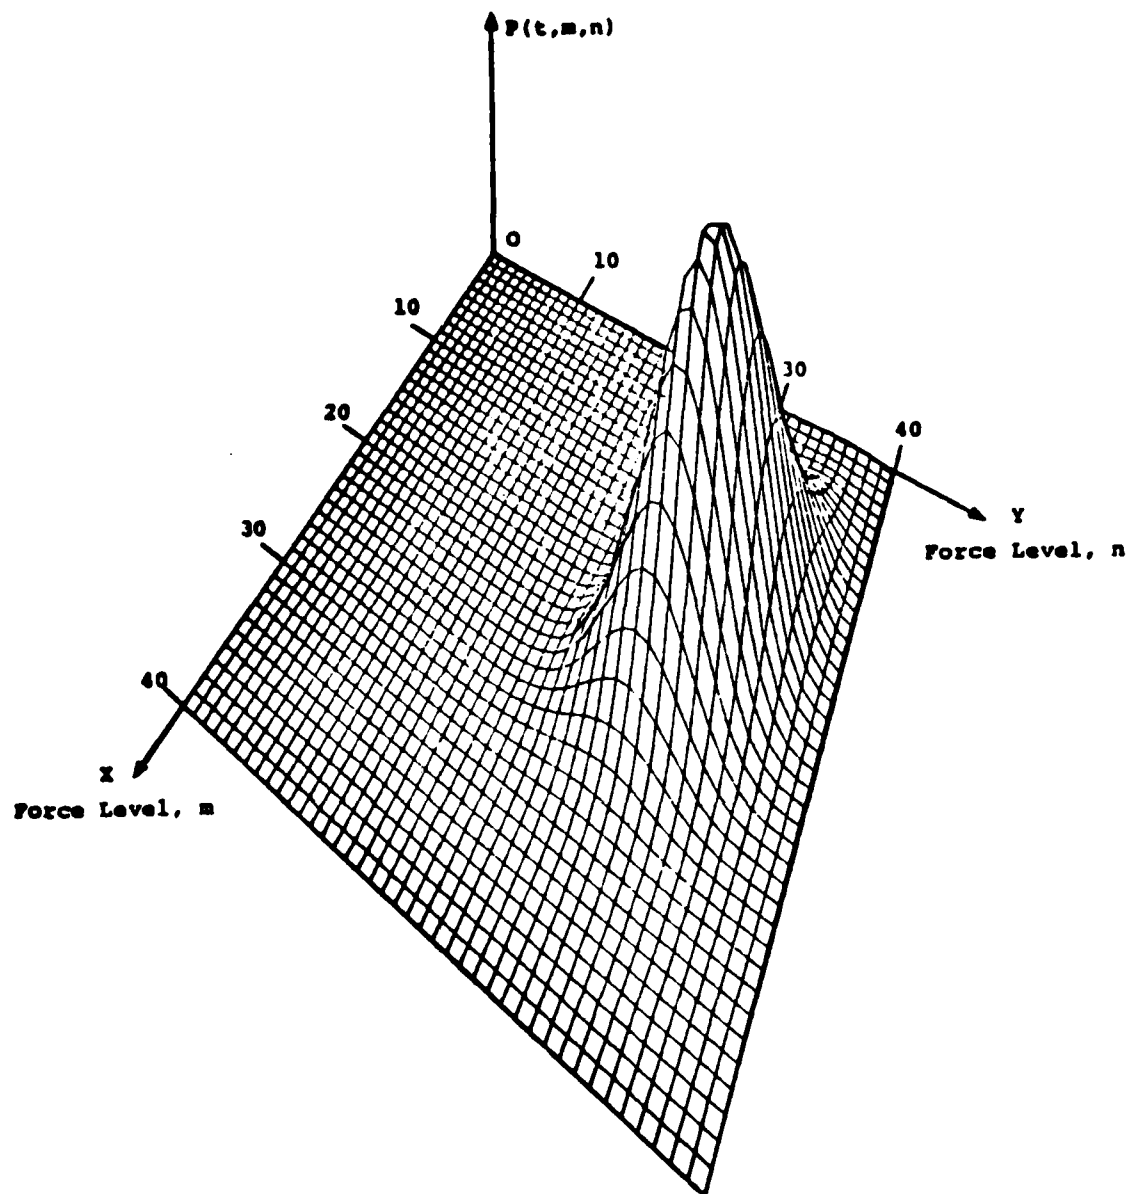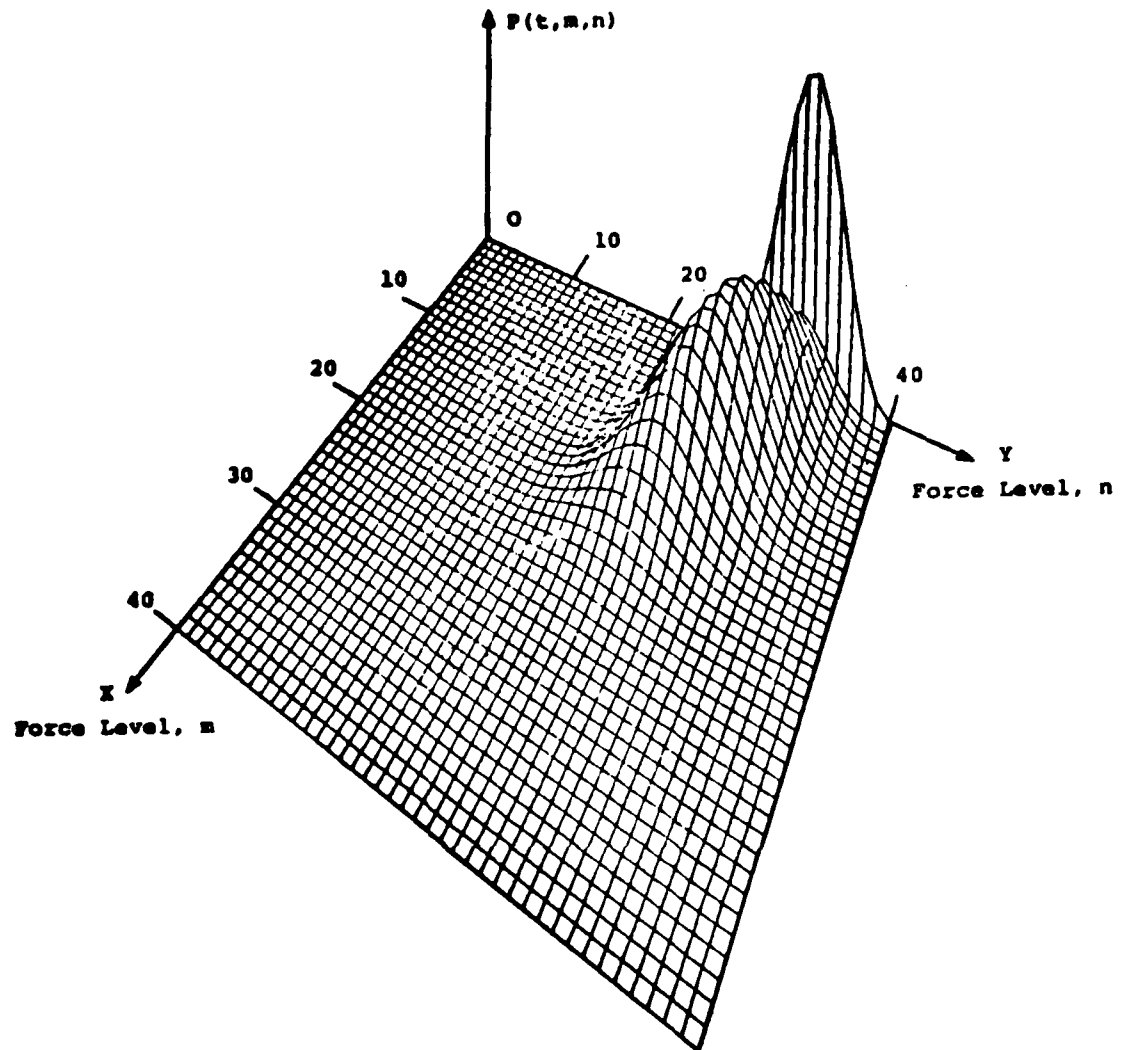Figure 11 - PLOT OF JOINT PROBABILITIES P(t,m,n)

with data according to Table 2

42
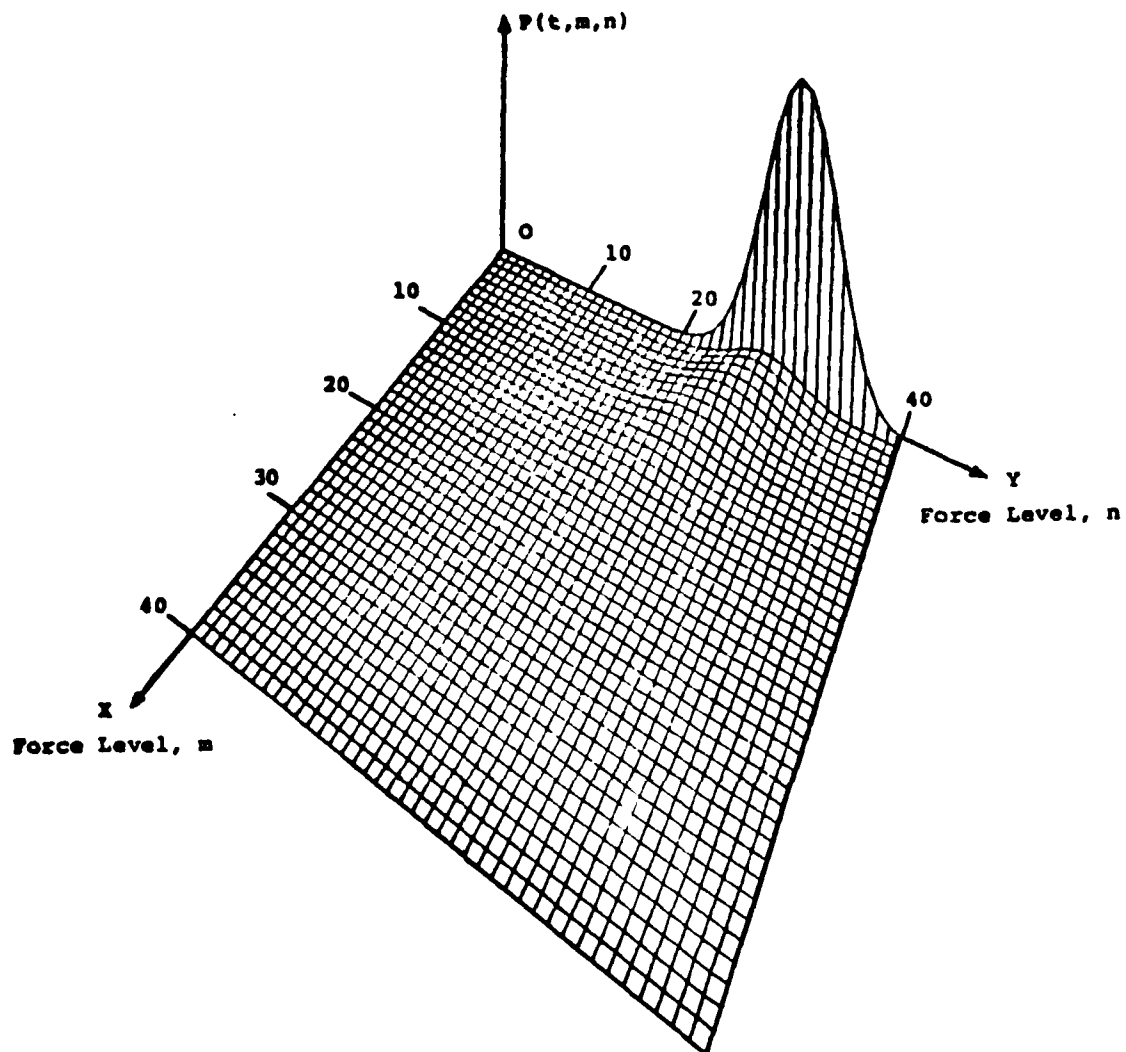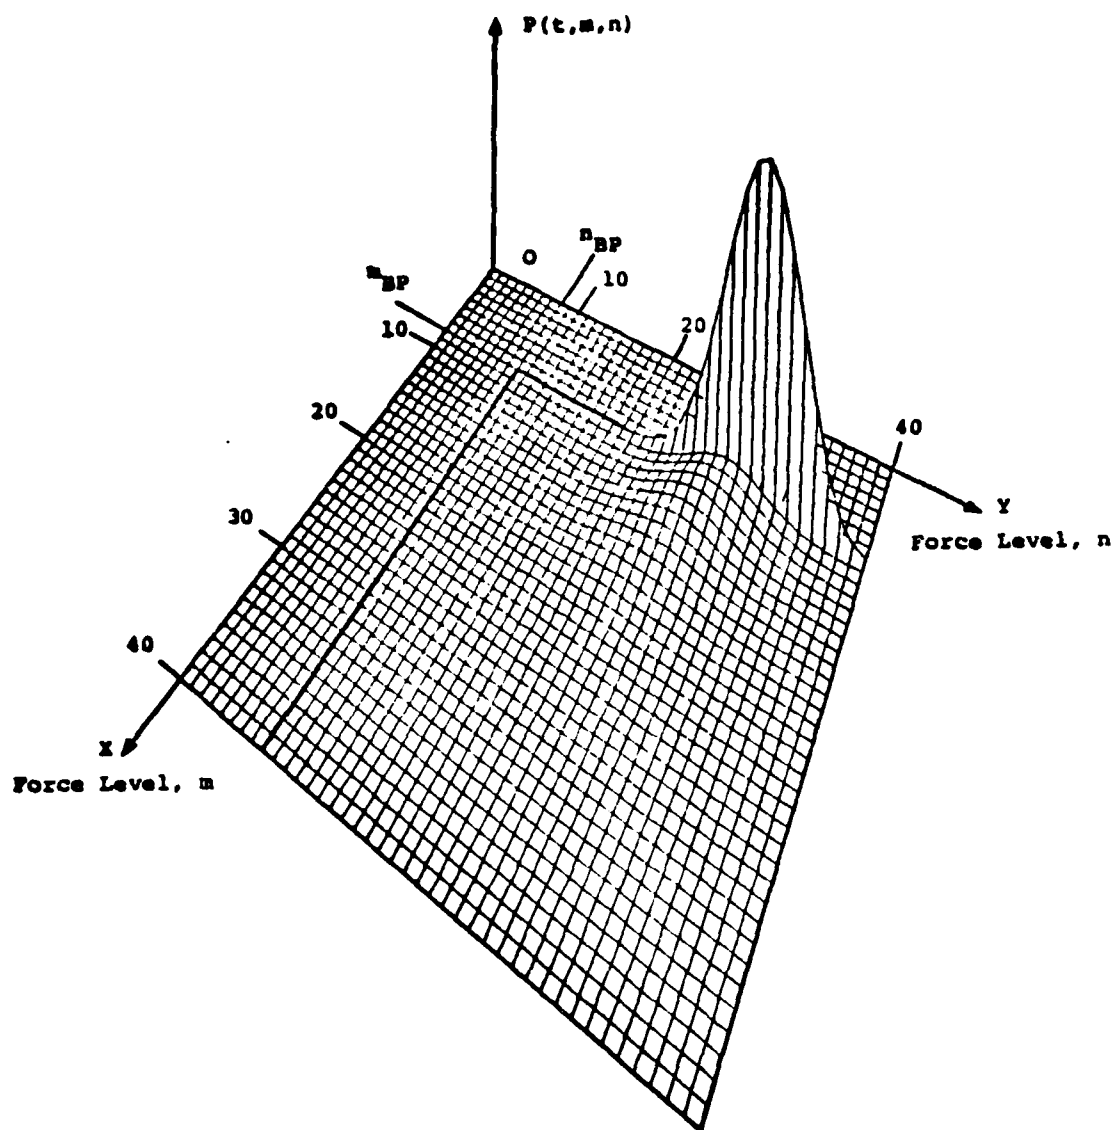
figure 12 - PLOT OF JOINT PROBABILITIES P(t,m,n)

with data according to Table 2

IV. EVOLUTION OF THE FORCE LEVELS

A. THE DETERMINISTIC MODEL

The evolution of force levels as a function of time, $X(t)$ and $Y(t)$, has already been stated in equations (2.5) and (2.6). The next two figures show the force levels with different breakpoints. It is easy to realize that introducing a nonzero breakpoint does not change the underlying function. In other words, using $X(t)$ as an example, for both figures the same curve was used but at the point where the X-force reaches its breakpoint, the curve is "cut." From that point in time, there are no more changes in the force levels. So introducing a nonzero breakpoint only shifts the discontinuity (marked by DX1 in Fig. 13) up along the curve to DX2.

The probability for one side to win is either one or zero, because it is a deterministic model. To easily determine which side is going to win, a victory prediction condition can be obtained by solving each force level equation (2.5) and (2.6) for the time to reach its breakpoint tx_{bp} by substituting $X(t)=x_{bp}$ and ty_{bp} by substituting $Y(t)=y_{bp}$. Then X will win if $ty_{bp} < tx_{bp}$, which leads to the prediction condition. X will win a fixed force breakpoint battle if and only if

$$x_0/y_0 > \frac{a(y_0^2 - y_{bp}^2)}{b(x_0^2 - x_{bp}^2)} \quad . \quad (4.1)$$

This shows that given the initial data one can predict the outcome of the battle in terms of force levels and time until the battle finishes.

44
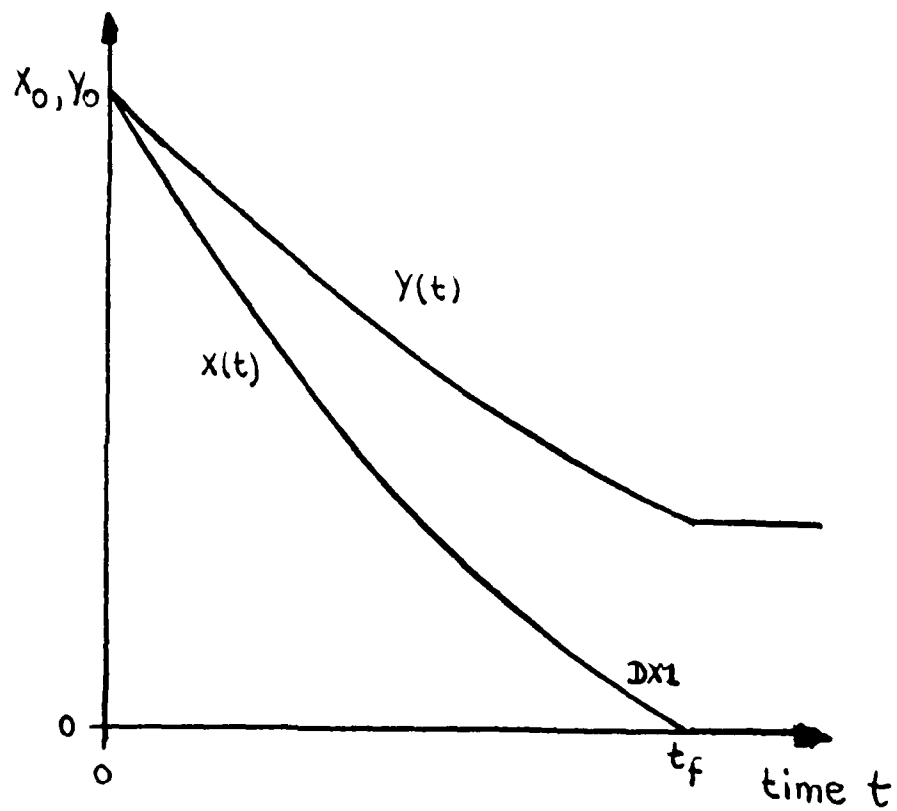
Figure 13 - FORCE LEVELS OVER TIME

Deterministic Model with Breakpoint $x_{bp} = 0$

45
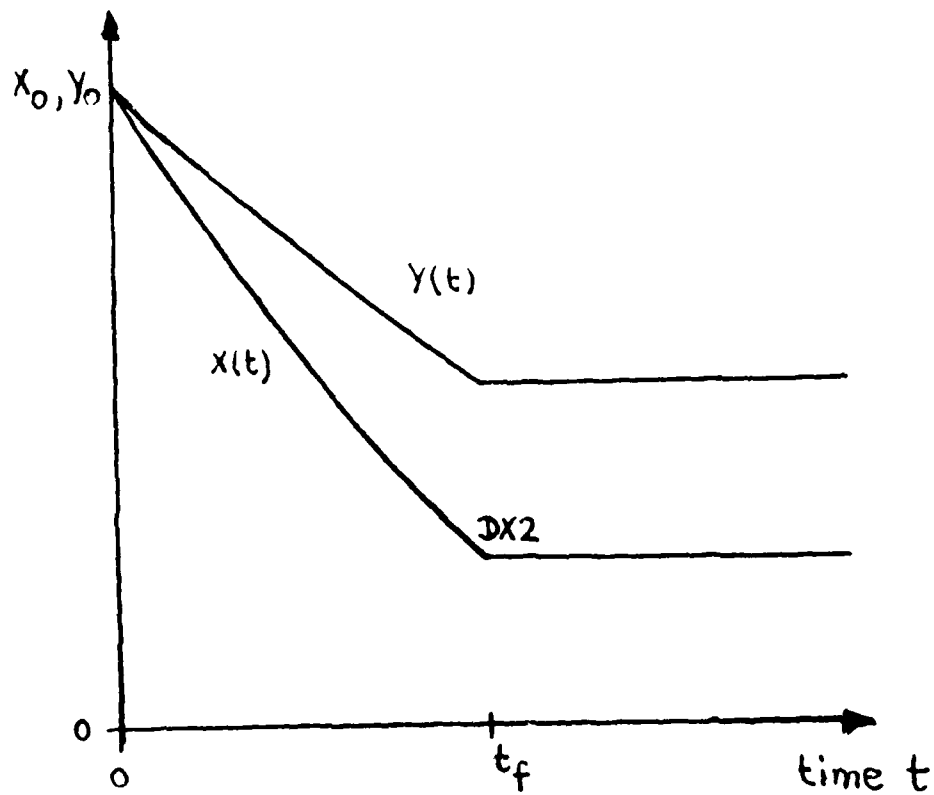
Figure 14 - FORCE LEVELS OVER TIME

Deterministic Model with Breakpoint $x_{bp} > 0$

46

B. THE STOCHASTIC MODEL

Every possible state (m,n) in the state space has associated with it a certain probability between zero and one which is a function of time. In order to gain more insight into the stochastic process not a single realization of a battle has to be considered, but an average battle. Therefore the expected value of the force levels (i.e. averages) as a function of time and the variances in the force levels were investigated.

The straight forward way to compute the expected force levels involves the knowledge of the probability distribution $P(t,m,n)$. Then

$$E(M(t)) = \sum_{m_{bp}}^{m_0} m \sum_{n_{bp}}^{n_0} P(t,m,n) \qquad (4.2)$$

$$E(N(t)) = \sum_{n_{bp}}^{n_0} n \sum_{m_{bp}}^{m_0} P(t,m,n) \qquad (4.3)$$

are the expected values of the force levels as a function of time.

There are some other ways to calculate the expected force levels, one of which will be stated here. Recall the "hybrid-analytical-numerical" method to get the state probabilities (equations 3.5 through 3.15). CLARK [4] has also shown that the i^{th} moment of, for example, the M-force level may be computed as

$$E(M^i(t)) = D_{0,0}^{(i)} + \sum_{j=1}^{m_0} \sum_{k=1}^{n_0} D_{j,k}^{(i)} \exp(-(ak+bj)t) \qquad (4.4)$$

with for $1 \leq j \leq m_0$ and $1 \leq k \leq n_0$

47

$$D_{j,k}^{(i)} = \sum_{m=1}^{j} m^i \sum_{n=0}^{k} C_{j,k}^{m,n} \qquad , \qquad (4.5)$$

$$D_{0,0}^{(i)} = \sum_{m=1}^{m_0} m^i \ C_{0,0}^{0,n} \qquad . \qquad (4.6)$$

This again emphasizes the strong point of CLARK's solution. For a given set of battle parameters the coefficients $C_{j,k}^{m,n}$ have to be computed only once. Then with this information and relatively small computational effort not only the state probabilities but also the first and second moment of the force levels can be computed. This determines the variance in the force levels at the same time, e.g.

$$Var(M(t)) = E(M^2(t)) - E(M(t)) \cdot E(M(t)) \qquad . \qquad (4.7)$$

On the other side, the weak point is that CLARK [4] considered only breakpoints equal zero.

Many authors have discussed one side's probability of winning or probability of winning conditioned on a certain number of survivors, which always eliminated the parameter time by integrating from time t=0 to infinity. This may be legitimate to answer absolute (meaning time independent) questions about who will win, but for direct comparisons with the deterministic model, this author has the feeling that the best question to ask regarding a winner is:

What is the probability of one side winning given the stochastic battle lasted as long as the deterministic one?

The calculation of these probabilities gives another interesting probability, because given the time $t = t_f$ (final time of the deterministic battle)

48

P(battle has not yet finished) =

$$1-P(M \text{ wins}|t=t_f)-P(N \text{ wins}|t=t_f) \qquad . \qquad (4.8)$$

There has also been work done regarding the distribution of the time to finish a battle. But this is beyond the scope of this thesis (SPRINGALL [9]).

C. DIFFERENCES IN THE FORCE LEVELS

The deterministic model, especially the force level equations (2.5) and (2.6), describe a process with continuous state parameters where, in reality, the possible states are integers. Quoting from LANCHESTER [7]:

> Since the forces actually consist of a finite number of finite units (instead of an infinite number of infinitesimal units) the end of the curve must show discontinuity, and break off abruptly when the last man is reached; the law based on averages evidently does not hold rigidly when the numbers become small.

LANCHESTER suggested that his differential equations may be good approximations only as long as the force sizes are large. He also stated that the equations are based on averages, implying an underlying stochastic process.

This shows that there must be a difference in the force levels which should become significant when the number of combatants is small. This difference was called bias by CLARK [4] and TAYLOR [10]. It can be shown that

$$\frac{dE(M(t))}{dt} = -aE(N(t))+aB_n(t) \qquad (4.9)$$

and

$$\frac{dE(N(t))}{dt} = -bE(M(t))+bB_m(t) \qquad (4.10)$$

where

49

$$B_n(t) = n_{bp} \sum_{m_{bp}+1}^{m_0} P(t,m,n_{bp}) + \sum_{n_{bp}+1}^{n_0} nP(t,m_{bp},n) \qquad (4.11)$$

and

$$B_m(t) = m_{bp} \sum_{n_{bp}+1}^{n_0} P(t,m_{bp},n) + \sum_{m_{bp}+1}^{m_0} mP(t,m,n_{bp}) \ . \qquad (4.12)$$

The bias terms $B_m(t)$ and $B_n(t)$ can be interpreted as the expected values of $M(t)$ or $N(t)$ conditioned on the fact that the battle has already ended at time t, for example,

$$B_m(t) = E\left(M(t))|N(t)=n_{bp} \text{ or } M(t)=m_{bp}\right) \qquad (4.13)$$

In other words, equation (4.9) says the expected casualty rate of the M-force is proportional to the expected number of survivors of the N-force given neither of the two forces has reached its breakpoint.

Define the bias of the X-force as $\Delta x(t) = E(M(t))-X(t)$ and the bias of the Y-force as $\Delta y(t) = E(N(t))-Y(t)$. Then using equations (2.8) and (2.9) together with (4.9) and (4.10) it follows that

$$\frac{d}{dt} \Delta x = -a\Delta y + aB_n(t) \qquad (4.14)$$

$$\frac{d}{dt} \Delta y = -b\Delta x + bB_m(t) \qquad (4.15)$$

with the initial conditions $x(0)=)$ and $Y(0)=)$. This has the solution

$$\Delta x(t) = \sqrt{ab} \int_0^t \{B_n(s)\sqrt{a/b}\cosh(\sqrt{ab}\ (t-s)$$
$$-B_m(s)\sinh(\sqrt{ab}\ (t-s))\}ds, \qquad (4.16)$$

50

and

$$\Delta y(t) = \sqrt{ab} \int_0^t \{B_m(s) \sqrt{b/a} \cosh(\sqrt{ab}(t-s)$$

$$-B_n(s)\sinh(\sqrt{ab}(t-s))\}ds \ . \qquad (4.17)$$

Since for a fixed, nonegative argument z, the cosh(z) is always greater than the sinh(z), it is easy to visualize that in most of the cases both biases are positive, meaning the expected force levels of the stochastic model are higher than the deterministic force levels. This has been shown by CLARK [4] and CRAIG [5] and confirmed by this author. In the rest of the cases the winner's bias is negative or close to zero and the loser's bias is positive. Two examples are given in Table 3.

51

TABLE 3

Examples for cases where one bias is positive and the other
bias is negative.

A. Y-force wins in a fight to the finish

$x_0 = y_0 = 40$ $\qquad\qquad\qquad\qquad\qquad\qquad a = 0.08$

$x_{bp} = 0$ $\qquad\qquad\qquad\qquad\qquad\qquad\qquad b = 0.04$

$y_{bp} = 0$

$t_f = 15.581$ $\qquad\qquad\qquad\qquad\qquad \Delta x(t_f) = 3.22$

$\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad \Delta y(t_f) = -0.23$

B. Y-force wins in a fight with equal initial force levels,
but different breakpoints.

$x_0 = y_0 = 15$ $\qquad\qquad\qquad\qquad\qquad\qquad a = 0.08$

$x_{bp} = 12$ $\qquad\qquad\qquad\qquad\qquad\qquad\quad b = 0.08$

$y_{bp} = 6$

$t_f = 2.85$ $\qquad\qquad\qquad\qquad\qquad\quad \Delta x(t_f) = 0.15$

$\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad \Delta y(t_f) = -0.10$

52

An interesting point has to be mentioned regarding case B of Table 3. Here the expected force level of the winner is smaller than the expected force level of the loser at the time a deterministic battle ends.

To get a better feeling for the differences in the force levels, the next two figures show as an example a large spectrum of force level behavior. The data and notation is described in Table 4. There are four battles with four different breakpoints drawn as they evolve over time from zero to the time an equivalent deterministic battle ends.

TABLE 4

$X_0 = 40$ $X_{bp}(i) = 40 - 0.2i$

$Y_0 = 40$ $Y_{bp}(i) = 40 - 0.2i$

$a = 0.09$ for $i = 1, 2, 3, 4$

$b = 0.07$

$Mi = E\ M(t)$

$Ni = E\ N(t)$ for $i = 1, 2, 3, 4$

Where the index i corresponds to the battle with

the i^{th} breakpoint force level:

    X-force is always loser

    Y-force is always winner
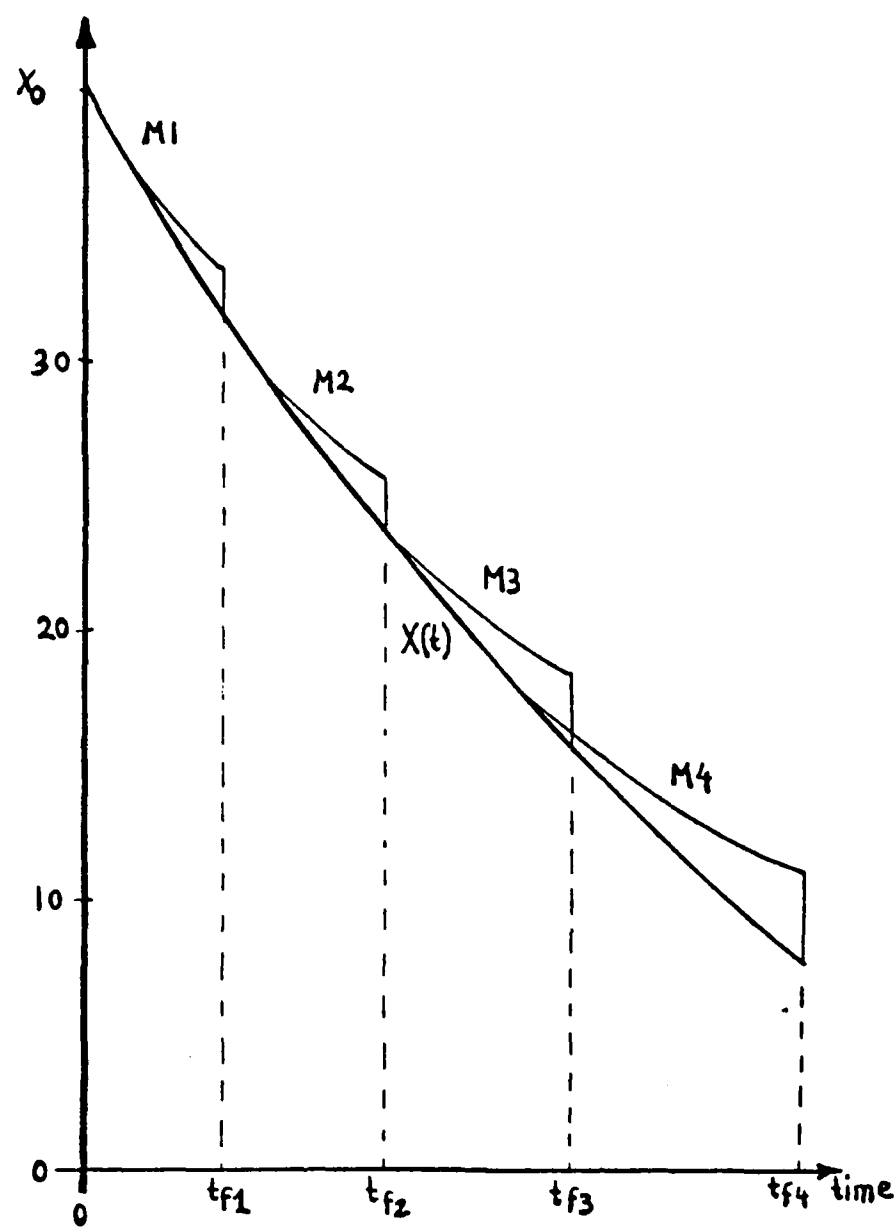
Figure 15 - DETERMINISTIC AND EXPECTED FORCE LEVELS FOR

THE X - FORCE
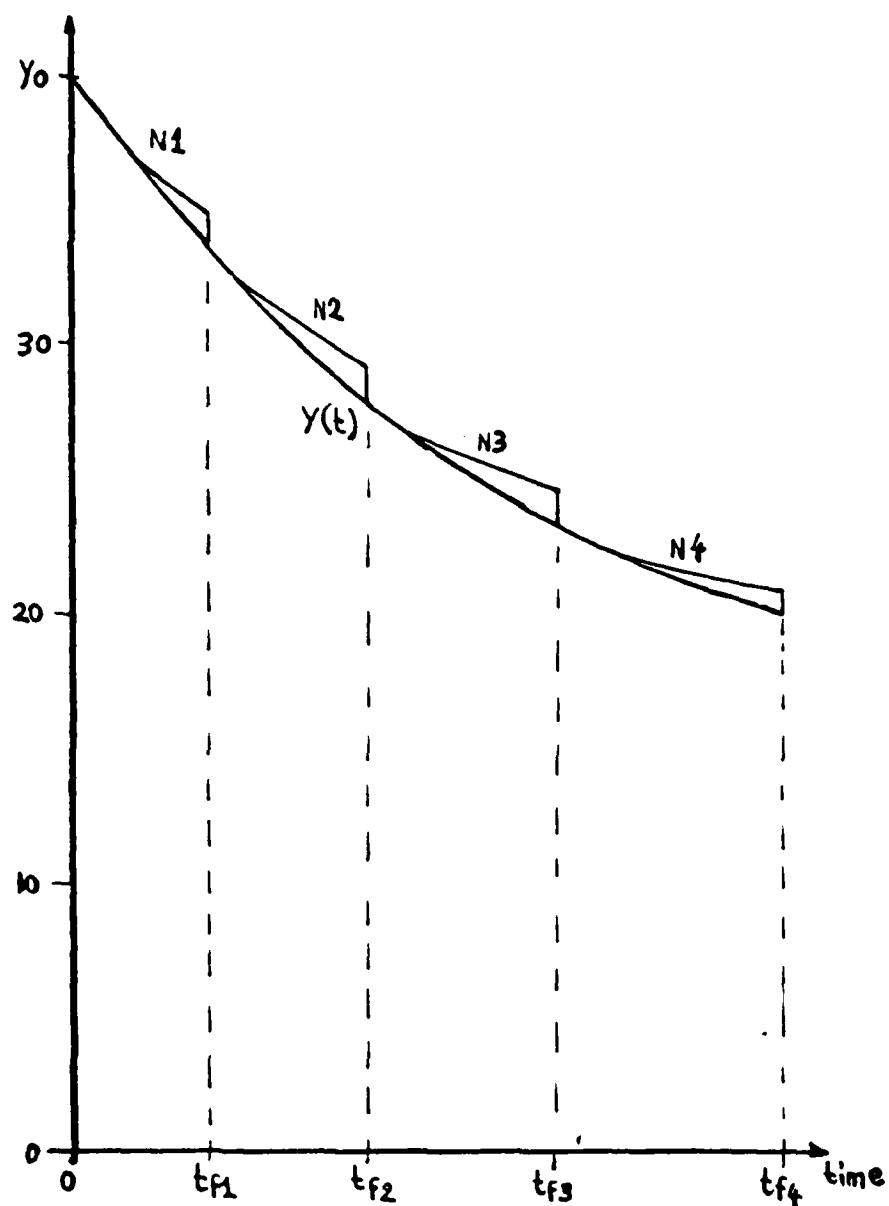
Figure 16 - DETERMINISTIC AND EXPECTED FORCE LEVELS FOR
THE Y - FORCE

CRAIG [5] has formulated hypotheses concerning the biases in the average force levels based on his work. His hypotheses were partially confirmed, but in some cases they have to be modified. Therefore, another similar set of hypotheses will be given and supported by Fig. 15 and Fig. 16, as well as some of the later figures.

H 1) Given fixed initial force levels and attrition rate coefficients, as the breakpoint force levels increase, the numerical bias for the loser decreases. The biases for the winner do not show this monotone trend except for the case of symmetric parity.

H 2) Everything else constant, the bias of the loser increases with increasing initial force levels; this is also true in the symmetric parity case for both forces.

H 3) Given the initial force level ratio is close to one at the time corresponding to the end of the deterministic battle, the bias of the loser is always larger than the bias of the winner.

H 4) At the time corresponding to the end of a deterministic battle, the biases become larger as the forces come closer to parity.

H5) The biases at times corresponding to less than one half the duration of the deterministic battle are negligible.

The case of symmetric parity, i.e. equal initial force levels, breakpoints and equal attrition rate coefficients seems to be kind of a "limiting" case. For example, at parity the biases of both forces behave in the same manner and are equal. In Fig. 17 the biases at the time a deterministic battle ends as a function of the initial force levels and as a function of the breakpoints are presented. It is also another verification for the hypotheses H 1 and H 2.
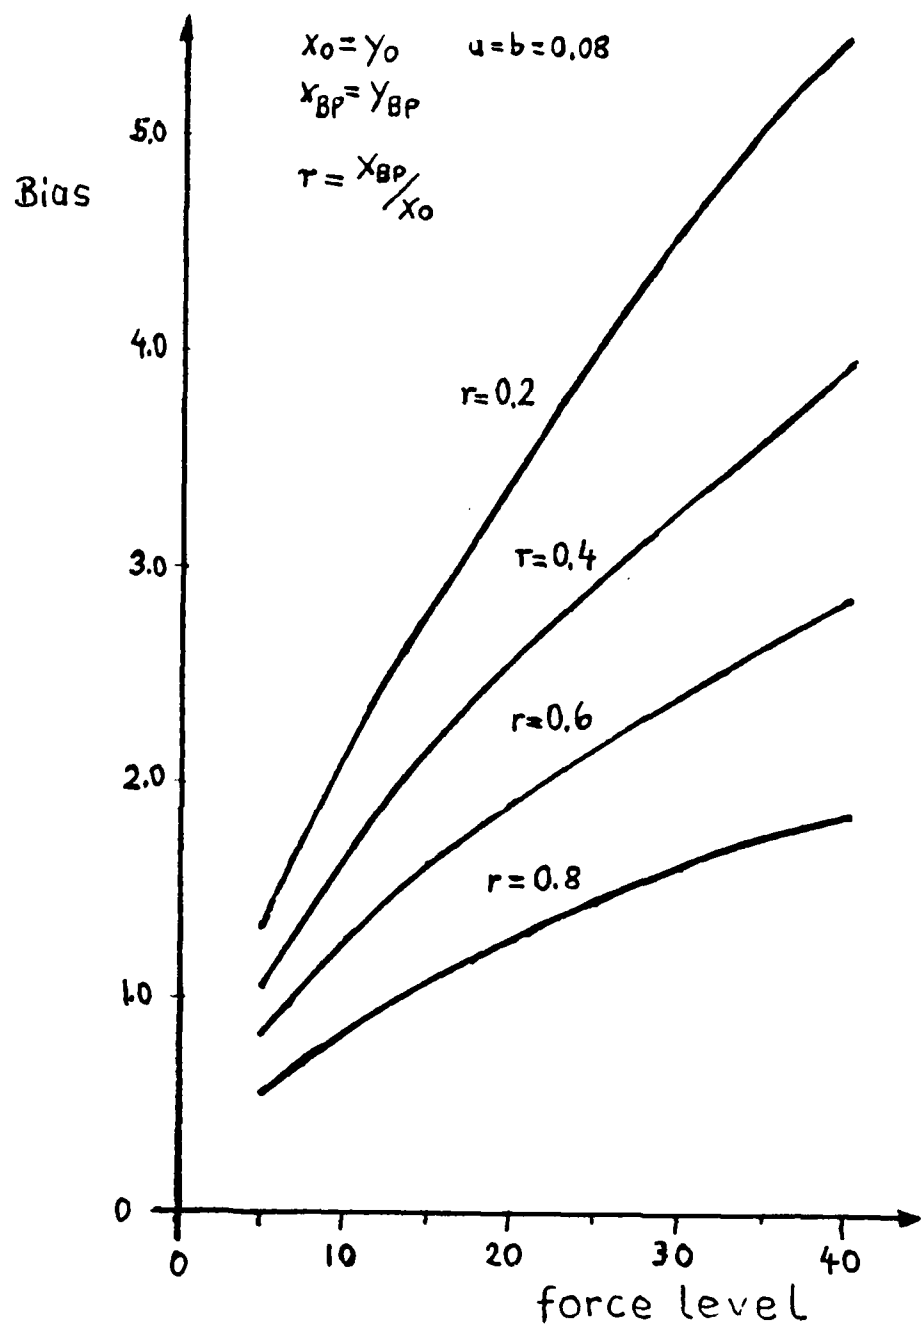
Figure 17 - BIASES IN SYMMETRIC PARITY

58
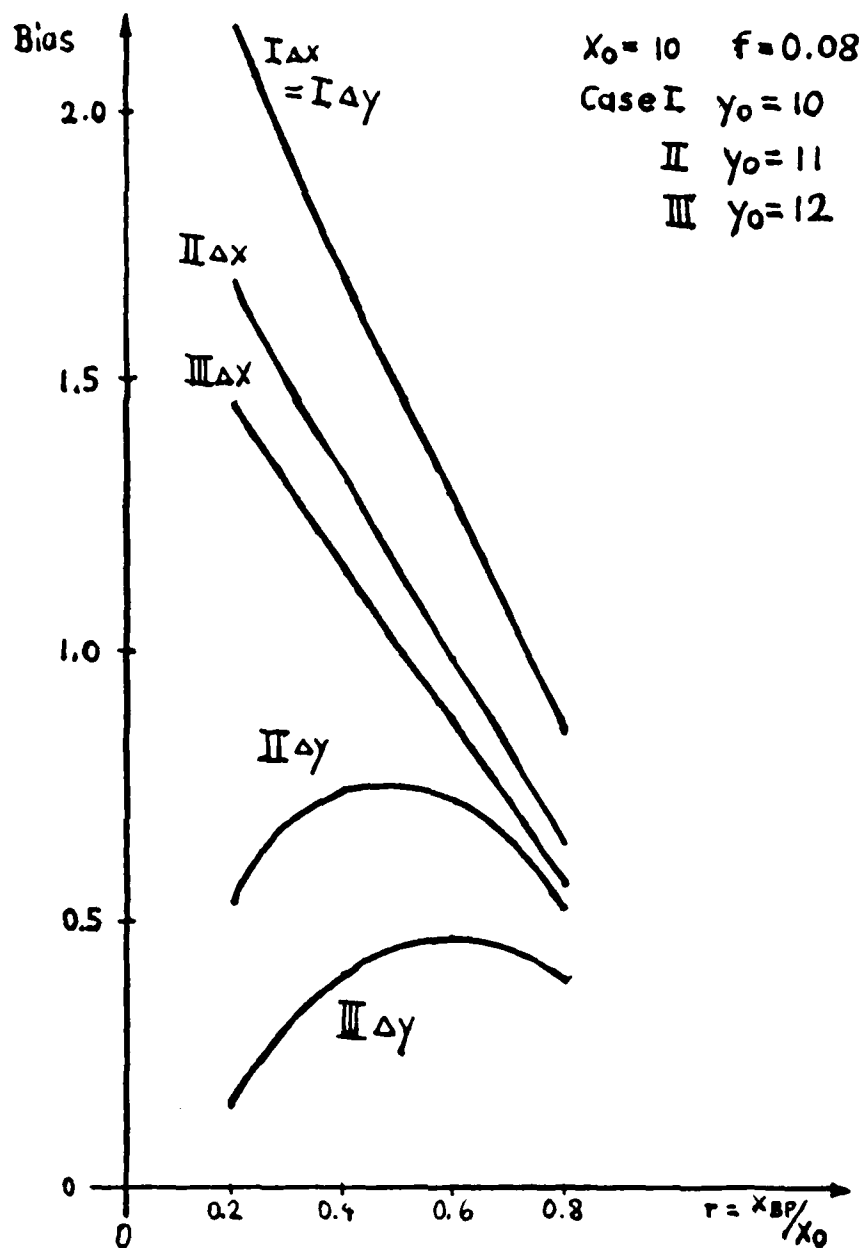
Figure 18 – BIASES WITH DIFFERENT INITIAL FORCE LEVELS
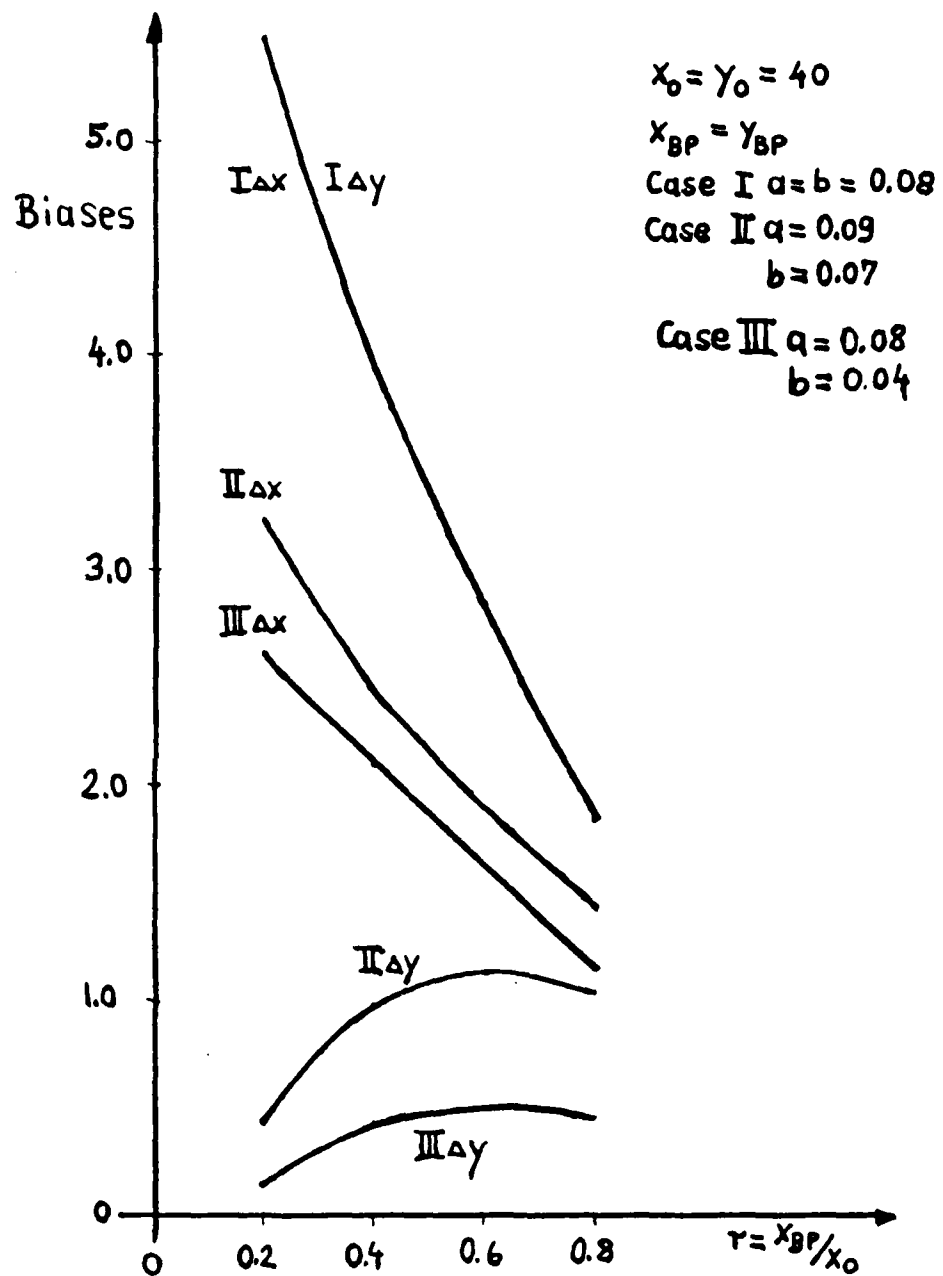
Figure 19 – BIASES WITH DIFFERENT ATTRITION RATE
COEFFICIENTS

60

Considering the changes in magnitude of the biases for battles like in Fig. 15, 16 and 17, CRAIG [5] came to the conclusion that when the forces are closer to parity, the biases at the deterministic battle's end increase. Several battles were fought starting with symmetric parity and then varying the force levels and the attrition rate coefficients. Sample results are shown in Fig. 18 and Fig. 19. In Fig. 18, the initial force levels were changed giving the Y-force ten and twenty percent higher initial force levels. The biases at the end of the deterministic battle are plotted as a function of the breakpoint force level ratio $r = x_{bp}/x_0$.

Fig. 18 supports CRAIG's hypothesis, as does Fig. 19. Here not the initial force levels but the attrition rate coefficients were changed in order to deviate from symmetric parity. The last way to deviate from symmetric parity is a case where the deterministic model gives equal answers for different battles. The data and the results are shown in Table 5.

TABLE 5

Equal initial force level battle with non equal breakpoints

$X_0 = 15$ $Y_0 = 15$ $a = b = f = 0.08$

X_{bp}	Y_{bp}	$\Delta x(t_f)$	$\Delta y(t_f)$
12	12	1.08	1.08
12	9	0.71	0.63
12	6	0.15	-0.10
12	3	0.68	0.58
9	9	1.62	1.62
9	6	1.14	0.93
9	3	1.06	0.75
6	6	2.15	2.15
6	3	1.67	1.22
3	3	2.84	2.84

The X-force level at time t_f is the same as the Y-force level. Thus, the expected force level for the winner (i.e. the Y-force) is smaller than the expected force level of the loser (the X-force), because $\Delta x(t_f)$ is always larger than $\Delta y(t_f)$. This is easy to see when one remembers the way the expected force level is computed (equation (4.3)). Since the Y-force has a lower breakpoint, there are states (m,n) possible where $n_{bp} < n < m_{bp}$. Apparently these states have a nonzero probability associated with them, which decreases the expected force level below the expected value for the X-force. This might be a starting point for further studies.

D. VARIABILITY IN THE FORCE LEVELS

Naturally in the deterministic case there does not exist any variability in the force levels. On the other hand, for the stochastic model, the variance in the force levels as a function of time is a measure of the dispersion of the number of survivors about their mean value.

CLARK [4] has hypothesized two different types of behavior for the variance in the force levels, which are shown in Fig. 20 for the data presented in Table 2. The first type of behavior is that of the variance for the N-force, i.e. the variance increases monotonely as a function of time and is asymptotic to a limiting value. It was found that this type of behavior occurs when the side is going to win and for the case of symmetric parity. The second type of behavior shown is the variance of the M-force, Var(M(t)), as a function of time. This increases to a maximum value then decreases asymptotically to a limiting value. This type of behavior is associated with the loser of the battle.

63

The variance in the force levels is a function of the initial and breakpoint force levels, the battle time and the attrition rate coefficients. Unfortunately one does not know what this dependence is. Based on many numerical results a set of hypotheses will be stated and the next figures will support them.

H 1) Given fixed initial force levels and attrition rate coefficients, as the breakpoint force levels increase the variance of the force levels decrease.

H 2) Everything else constant the variance of the loser's force level increases with increasing initial force levels. This is also true for both variances in the case of symmetric parity.

H 3) Given the initial force ratio is close to one at the time corresponding to the end of the deterministic battle the variance of the loser's force level is always smaller than the winner's variance.

H 4) At the time corresponding to the end of the deterministic battle the variance in the loser's force level increases as the forces come closer to parity. This trend is not true for the variance of the winner, except for the case of symmetric parity.

It was the intention of this author that the set of cases to illustrate the hypotheses are the same as in the illustrations (Fig. 17, 18 and 19) of the hypotheses about biases. So, Fig. 21 shows the force level variances for the different initial force levels and different breakpoints for the case of symmetric parity. In Fig. 22 the variances for a battle with equal attrition rate coefficients but varying initial force levels show that H 4 is only true for the loser. This point is emphasized by Fig. 23, where with constant and equal initial force levels the attrition rate coefficients were varied.

64
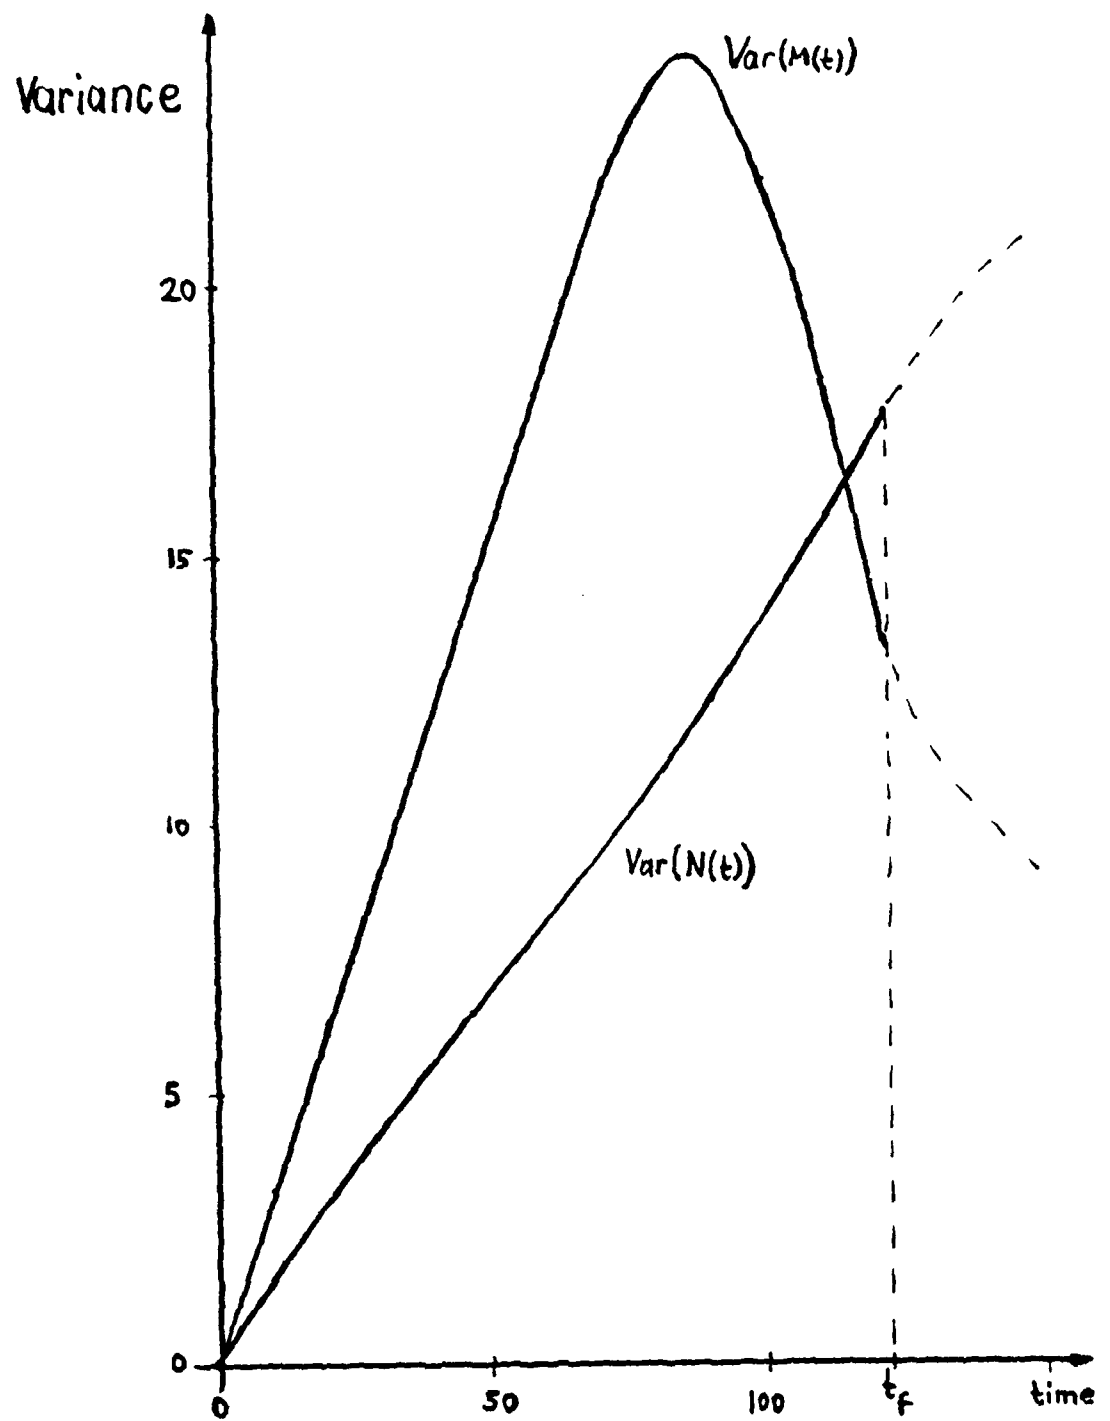
Figure 20 — FORCE LEVEL VARIANCES OVER TIME

65
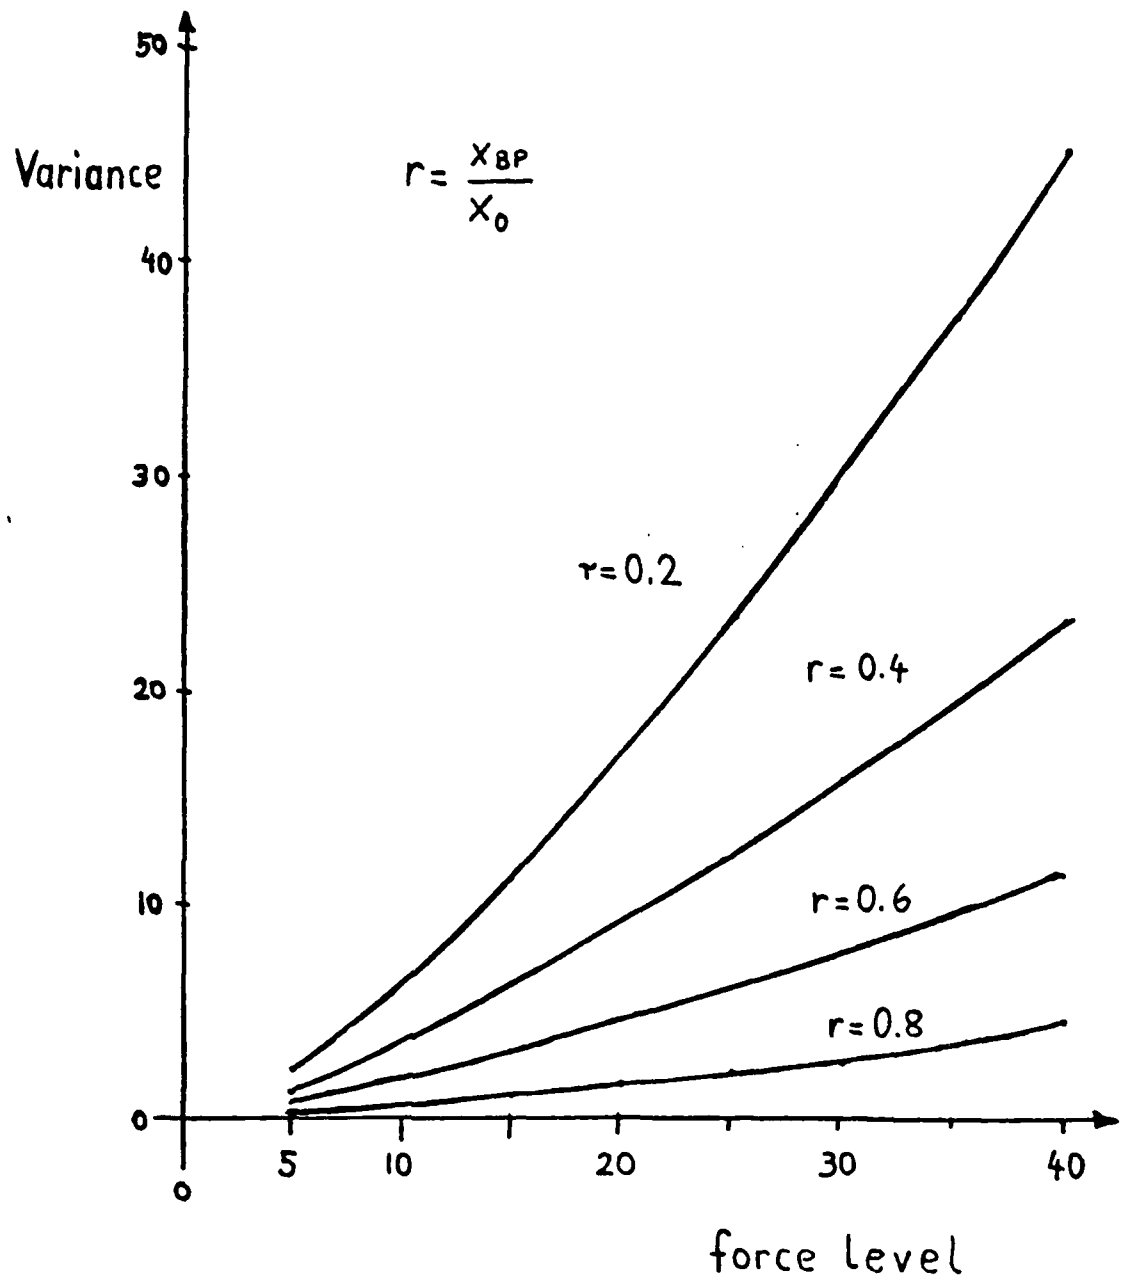
Figure 21 - VARIANCES IN SYMMETRIC PARITY
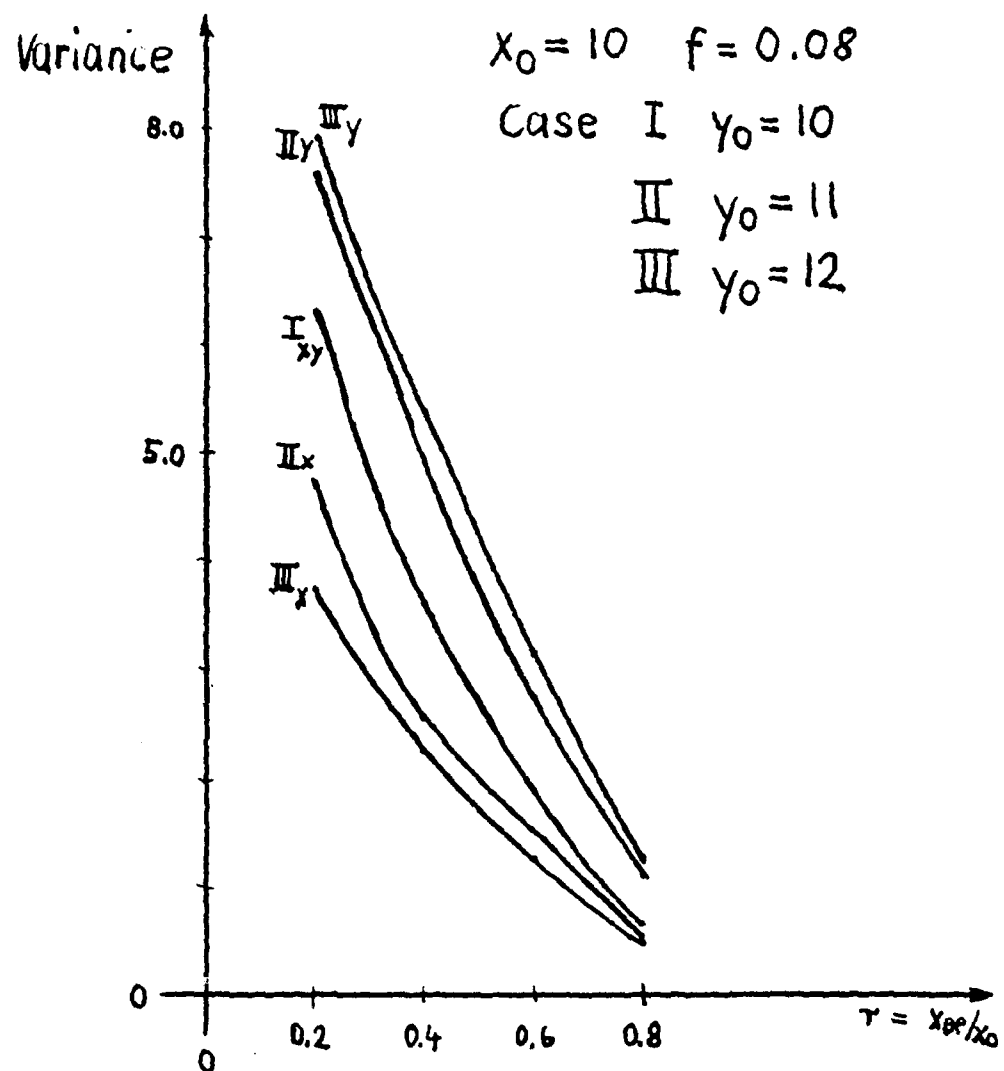
Figure 22 – vARIANCES WITH vIFFERENT INITIAL FORCE LEVELS

67

Figure 23 - VARIANCES WITH DIFFERENT ATTRITION RATE
COEFFICIENTS

V. COMPUTATIONAL ASPECTS

A. USING THE NUMERICAL SOLUTION

For most of the numerical work, the state probabilities have been obtained using the fourth-order RUNGE-KUTTA method. The accuracy of the results was increased by substituting the available analytical results for the Regions I, II and III.

The disadvantage is that this solution method needs a lot of CPU-time. For the battle in Example 1, with the data given in Table 1, the calculation of the state probabilities, expected force levels and variances led to a CPU-time on an IBM-360 computer of almost 90 minutes with a time step size of 0.05 minutes. That was the reason why, in the examples the attrition rate coefficients were increased by one magnitude, which brought the computer usage down to a CPU-time of around 12 minutes with the same time step size of 0.05 minutes. The sum of the state probabilities at every time step was used as a measure of accuracy. Surprisingly, its deviation from 1.0 was always in the fourth or fifth decimal, which proves the robustness of the RUNGE-KUTTA method. Also, the fact that for the Regions I, II and III analytical solutions were substituted at each time step did not change the final outcome considerably. It was found that without the analytical partial solutions the sum of probabilities tended to be slightly higher, changing the sum of probabilities from, for example, 0.99998 to 1.00003.

B. THE EQUAL ATTRITION RATE COEFFICIENT SOLUTION

After the development of the equal attrition rate coefficient solution (EARCS) outlined in Ch. III.C, it was implemented on an IBM-360 computer. The CPU-time for the calculation of the state probabilities, expected force levels and variances for a given point in time always stayed below 20 seconds, which emphasizes its computational advantage.

Further research showed two shortcomings of the EARCS, which are easily overlooked. The coefficients $C(m,n)$ vary over a wide range starting at 1.0 and depending on the initial force levels.

For example for a battle with

$$m_0 = 20 \qquad m_{bp} = 15$$

$$n_0 = 40 \qquad n_{bp} = 20$$

$$f = 0.08 \qquad t_f = 1.60995$$

$$C(20,40) = 1.0 \quad \text{but} \quad C(16,21) = 4.9297077276 \times 10^{33}.$$

Also, the binomial coefficients in equations (3.23) and 3.24) vary over a wide range starting at 1.0 to 1352078 for the above example. This shows that the capacity the computer, in terms of the number of significant digits, is able to carry limits the implementation of this solution in the present form.

Another reason why this solution is not the end of the numerical problems is the fact that in the given form, equations (3.23) and (3.24) require computation of an alternate sum consisting of terms whose factors are relatively large binomial coefficients and small numbers between zero and one. This produces truncation errors, which yield nonsensical results like negative variances and sums of probabilities greater than one.

70

VI. CONCLUSIONS

Throughout this thesis, only LANCHESTER-type square-law attrition with fixed initial force levels and fixed attrition rate coefficients has been considered for a deterministic and a stochastic version. The stochastic version required much more computational effort. So, given the need for an analytical model as opposed to the use of simulation, there is not much to gain from the application of a stochastic model when the force levels are large and the forces are not near parity. In these cases the deterministic version essentially produces the same results, at least in qualitative terms. For smaller force levels or forces near parity, the stochastic version may be helpful to get more information about the dynamics of combat.

Also, there exist one case where the deterministic version cannot differentiate between several different battles. That is the case of equal initial forces, equal attrition rate coefficients, but different breakpoint force levels. This also rectifies the further development of the equal-attrition-rate-coefficient-solution (EARCS).

Using an analytical model, the discussed way of introducing random-ness into the model seems not to be very enlightening. Therefore, it is suggested that another way to include random effects should be explored. The author's opinion is that working with attrition rate coefficients which are random variables seems more promissing to gain insight into the dynamics of combat. Further down the line there should be some

consideration on the usage of combinations of the possibilities to
include random effects as given in Chapter II.B.

```
1       C   THIS PROGRAM COMPUTES THE STATE PROBABILITIES USING THE FOURTH
2       C   ORDER RUNGE-KUTTA METHOD. PLOTS OF THE EXPECTED FORCE LEVELS AND
3       C   VARIANCES AS WELL AS  3-D-PLOTS FOR THE STATE PROBABILITIES ARE
4       C   OBTAINED.
5       C
6               DIMENSION P1 (33,33), P2 (33,33), T3D (20)
7               DIMENSION XMT (500), XNT (500), QT (500), VM (500), VN (500),
8             1 VMB (551), VNB (551), VQ (551), VARX (551), VARY (551), TIM (551)
9               DIMENSION EST (313),D (313),F (2),SIZE (2),KX (100),KY (100),WK (41,41,3)
10            1              ,          PC (41,41),CST (41),CETERM (41)
11              LOGICAL*1 IDN (41,41)
12              DIMENSION DETERM (313)
13              REAL*8 TTL (12) /12*'         '/
14              REAL K1, K2, K3, K4
15              CALL ERRSET (208,600,-1,1)
16              F (1) =0.
17              F (2) =0.
18              LINES=0
19              SIZE (1) =6.
20              SIZE (2) =8.
21              QFLAG = 0.
22              NKXY=100
23              READ (5,21) MBP, MO, NBP, NO
24              READ (5,22) AA, BB
25              READ (5,22)  H, FTIM
26              READ (5,21) N3D
27              READ (5,22) EPSQ, EPSPTT
28              T3D (1) = 9999.
29              IF (N3D .LT. 1) GO TO 25
30              READ (5,22)  (T3D (I), I=1,N3D)
31           25 CONTINUE
32       C
33       C   N3D=NUMBER OF 3D-PLOTS,  H=SIZE OF TIME STEP
34       C   FTIME=FINALTIME, EPSQ,EPSPTT  ARE ZERO LEVELS
35       C   T3D (I) = FRACTION OF FTIME WHEN TO PLOT 3D
36       C
37              DO 10 I=1,N3D
38              T3D (I) =FTIM*T3D (I)
39           10 CONTINUE
40           21 FORMAT (16I5)
41           22 FORMAT (8F10.5)
42              WRITE (6,28) MBP, MO, NBP, NO
43           28 FORMAT (// 5X, 'M S & N S', 5X, 4I6 /)
44              WRITE (6,29) AA, BB
45           29 FORMAT (/ 5X, 'A & B', 9X, 2F10.3 /)
46              WRITE (6,30)  H, FTIM
47           30 FORMAT (/ 5X, 'INITIAL H & FINAL TIME (= LOOPS * H)', 5X, 2F10.3/)
48              WRITE (6,31) N3D
49           31 FORMAT (// 5X, '* OF 3-D PLOTS', 2X, I6 /)
50              IF (N3D .LT. 1) GO TO 36
```

```
51              WRITE (6,24)  EPSQ,EPSPTT
52         24 FORMAT (/ 5X, 'EPSQ=',F10.5,5X, 'EPSPTT=',F10.5)
53              WRITE (6,32)  (T3D (I) , I=1,N3D)
54         32 FORMAT (/ 5X, 'AT TIME', 2X, 10F10.3 /)
55         36 CONTINUE
56              MO1 = MO + 1
57              NO1 = NO + 1
58              NS = NO1 - NBP
59              MS = MO1 - MBP
60              MSL = MS + 1
61              NSL = NS +1
62              BMO = BB × MO
63              ANO = AA × NO
64              QANB = ANO / BB
65              QBMA = BMO / AA
66              BAT = - (BMO + ANO)
67              DO 47 M1 = 1,MS
68              VM (M1) = MBP + M1 - 1
69         47 CONTINUE
70              DO 48 N1 = 1,NS
71              VN (N1) = NBP + N1 - 1
72         48 CONTINUE
73              L = 0
74              N3 = 1
75              TPLOT = T3D (N3)
76              TIME = 0.
77         50 CONTINUE
78              IF (TIME .GT. FTIM) GO TO 210
79         52 CONTINUE
80              TIME = H × L
81              L = L + 1
82              LB  = 0
83              TIM (L) = TIME
84              IF ( L .EQ. 2) GO TO 53
85              IF (TIME .LT. TPLOT) GO TO 60
86      C
87      C     SET NEXT PLOT TIME
88      C
89              N3 = N3 + 1
90              TPLOT = T3D (N3)
91              IF (N3.GT.N3D) TPLOT=9999.
92         53 CONTINUE
93      C
94      C     LB = L WHEN TIME TO PLOT
95      C
96              LB = L
97              EBT = EXP (BB × TIME) - 1.
98              EAT = EXP (AA × TIME) - 1.
99              AE = QANB × EBT
100             BE = QBMA × EAT
```

74

```
101          BRE = EXP(BAT * TIME)
102          FJ = 1.
103          JJ = 1
104    C
105    C     NO VALUE OF J = ZERO AT MO,NO
106    C
107          FK = 1.
108          KK = 1
109          QFK=1.
110          QFJ=1.
111    C
112    C     NO VALUE OF K = ZERO AT MO,NO
113    C
114       60 CONTINUE
115          IF (L .EQ. 1) GO TO 500
116          QQ=0.
117          DO 400 N1 = 1,NS
118          N = NO1 - N1
119          NL = NSL - N1
120          NL1 = NL + 1
121          ANJ = AA * N
122    C
123    C
124          DO 300 M1 = 1,MS
125          M = MO1 - M1
126          ML = MSL - M1
127          ML1 = ML + 1
128          BMI = BB * M
129          ABA = ANJ + BMI
130          IF (M .EQ. MO) GO TO 502
131          IF (M .EQ. MBP) GO TO 504
132          IF (N .EQ. NO) GO TO 506
133          IF (N .EQ. NBP) GO TO 507
134    C
135    C             DEFAULTS TO ALL INSIDE POINTS
136    C
137          K1 = ANJ*P2(ML1,NL) + BMI*P2(ML,NL1) - ABA*P2(ML,NL)
138          PT = ANJ*0.5* (P1(ML1,NL)+P2(ML1,NL)) + BMI*0.5 * (P1(ML,NL1) +
139        1 P2(ML,NL1))
140          K2 = PT - ABA * (P2(ML,NL) + H*0.5*K1)
141          K3 = PT - ABA * (P2(ML,NL) + H*0.5*K2)
142          K4 = ANJ*P1(ML1,NL) + BMI*P1(ML,NL1) - ABA*(P2(ML,NL) + H*K3)
143          P1(ML,NL) = P2(ML,NL) + (H/6.0) * (K1+2.0*K2 + 2.0*K3 + K4)
144          GO TO 200
145      502 IF (N .EQ. NO) GO TO 503
146          IF (N .EQ. NBP) GO TO 507
147    C
148    C             M=MO, N=-NO,NBP
149    C
150          K1 = BMI*P2(ML,NL1) - ABA*P2(ML,NL)
```

75

```
151          PT = BMI×0.5 × (P1(ML,NL1) + P2(ML,NL1))
152          K2 = PT - ABA × (P2(ML,NL) + H×K1×0.5)
153          K3 = PT - ABA × (P2(ML,NL) + H×K2×0.5)
154          K4 = BMI × P1(ML,NL1) - ABA × (P2(ML,NL) + H×K3)
155          P1(ML,NL) = P2(ML,NL) + (H/6.) × (K1+2.0×K2 + 2.0×K3 + K4)
156          IF (LB .EQ. L) GO TO 601
157          GO TO 200
158    C
159    C              M=MO, N=NO
160    C
161      503 CONTINUE
162          P1(ML,NL) = EXP(-ABA × TIME)
163          WRITE(6,102) L, N, ML,NL, P1(ML,NL)
164          GO TO 200
165      504 IF (N .EQ. NBP) GO TO 505
166    C
167    C
168    C              M=MBP, N-= NBP
169    C
170          K1 = ANJ × P2(ML1,NL)
171          K2 = ANJ × 0.5 × (P1(ML1,NL) + P2(ML1,NL))
172          K3 = K2
173          K4 = ANJ × P1(ML1,NL)
174          P1(ML,NL) = P2(ML,NL) + (H/6.0) × (K1 + 2.0×K2 + 2.0×K3 + K4)
175          GO TO 200
176    C
177    C              M=MBP, N=NBP
178    C
179      505 CONTINUE
180          P1(ML,NL) = 0.0
181          GO TO 200
182    C
183    C              N=NO, M-=MBP, MO
184    C
185      506 K1 = ANJ×P2(ML1,NL) - ABA×P2(ML,NL)
186          PT = ANJ × 0.5 × (P1(ML1,NL) + P2(ML1,NL))
187          K2 = PT - ABA × (P2(ML,NL) + H×0.5×K1)
188          K3 = PT - ABA × (P2(ML,NL) + H×0.5×K2)
189          K4 = ANJ × P1(ML1,NL) - ABA × (P2(ML,NL) + H×K3)
190          P1(ML,NL) = P2(ML,NL) + (H/6.0) × (K1 + 2.0×K2 + 2.0×K3 + K4)
191          IF (LB .EQ. L) GO TO 602
192          GO TO 200
193    C
194    C              N=NBP, & N=NBP, M=MO
195    C
196      507 CONTINUE
197          K1 = BMI × P2(ML,NL1)
198          K2 = BMI × 0.5 × (P1(ML,NL1) + P2(ML,NL1))
199          K3 = K2
200          K4 = BMI × P1(ML,NL1)
```

```
201          P1(ML,NL) = P2(ML,NL) + (H/6.0) * (K1 + 2.0*K2 + 2.0*K3 + K4)
202          GO TO 200
203    C
204    C              ALSO M=MO, N=NBP,NO
205    C
206      601 CONTINUE
207          IF((BE.LT.1.).AND.(KK.GT.9)) GO TO 255
208    C
209    C     COMPUTE PTT IF BE > 0 & KK < 10
210    C
211          PTT=BAE
212          DO 250 IND=1,KK
213          XIND=IND
214          PTT=PTT*BE/XIND
215      250 CONTINUE
216          GO TO 260
217      255 PTT=0.
218      260 CONTINUE
219          KK = KK + 1
220          IF((ABS(P1(ML,NL) -PTT)).LE.EPSPTT) GO TO 199
221          GO TO 700
222    C
223    C              M=MBP, N=NO
224    C
225      602 CONTINUE
226          IF((AE.LT.1.).AND.(JJ.GT.9)) GO TO 270
227    C
228    C
229    C     COMPUTE PTT IF AE > 0 & JJ < 10
230    C
231          PTT=BAE
232          DO 265 IND=1,JJ
233          XIND=IND
234          PTT=PTT*AE/XIND
235      265 CONTINUE
236          GO TO 275
237      270 PTT=0.
238      275 CONTINUE
239          JJ = JJ + 1
240          IF((ABS(P1(ML,NL) -PTT)).LE.EPSPTT) GO TO 199
241      700 CONTINUE
242    C
243    C     TIME REDUCED 1/2
244    C
245          L = L - 1
246          WRITE(6,701) TIME, M, N, H
247      701 FORMAT(// 5X, 'H VALUE IS REDUCED BY HALF AT : TIME = ', F8.3,
248        1   ' M = ', I5, ' N = ', I5, ' FROM ', F8.3 //)
249          H = 0.5 * H
250          WRITE(6,102) L,M,N,KK, PTT, P1(ML,NL),QFK, QFJ,QQ,QFLAG
```

```
251        102 FORMAT (/ 2X, 4I5, 7F12.5)
252            QFLAG=0.
253            GO TO 52
254        199 PTT=P1 (ML,NL)
255        200 CONTINUE
256            QQ=QQ+P1 (ML,NL)
257        300 CONTINUE
258        400 CONTINUE
259            QQ1=ABS (QQ-1.)
260            IF (QQ1.LE.EPSQ) GO TO 401
261            QFLAG=1.
262            GO TO 700
263        401 CONTINUE
264    C
265    C      COMPUTE VARX(T), VARY(T),NBAR(T),MBAR(T),Q(T)
266    C
267            SMB = 0.
268            SNB = 0.
269            SQ = 0.
270            SM2 = 0.
271            SN2 = 0.
272            DO 415 M1 = 1,MS
273            RM = VM(M1)
274            RM2 = RM*RM
275            DO 410 N1 = 1,NS
276            RN = VN(N1)
277            RN2 = RN*RN
278            PT = P1 (M1,N1)
279            P2 (M1,N1) = PT
280            SMB = SMB + RM*PT
281            SNB = SNB + RN*PT
282            SQ = SQ + PT
283            SM2 = SM2 + RM2 * PT
284            SN2 = SN2 + RN2 * PT
285        410 CONTINUE
286        415 CONTINUE
287            VMB (L) = SMB
288            VNB (L) = SNB
289            VQ (L) = SQ
290            VARX (L) = SM2 - SMB*SMB
291            VARY (L) = SN2 - SNB*SNB
292    C
293    C      RETURN TO MAIN LOOP (50) IF NOT TIME TO PRINT
294    C
295            IF (N3D .LT. 1) GO TO 430
296            IF (LB.NE.L) GO TO 430
297            IF (LB.EQ.2) GO TO 430
298    C
299    C      ADJUST X,Y, VECTORS FOR PLOT
300    C
```

78

```
301          DO 15 K=1,MS
302       15 EST(K)=K-1
903          DO 16 K=1,NS
904          DETERM(K)=K-1
305       16 CONTINUE
306          DO 115 I=1,41
307          CST(I)=I
308          CETERM(I)=I
909          DO 115 J=1,41
310          PC(I,J)=0.0
311      115 CONTINUE
312          MP=41
313           NP=41
314          ALP=15.
315          BETA=30.
316          PMAX=P1(1,1)
317          DO 116 I=1,NS
918          WRITE(6,199)I,P1(1 ,1),P1(I,1 )
319      199 FORMAT(' ',I5,10X,2F15.5)
320      116 CONTINUE
321          DO 18 I=1,MS
922          DO 18 J=1,NS
323          IF(P1(I,J).GT.PMAX) PMAX=P1(I,J)
324       18 CONTINUE
325          CONST=8.0/PMAX
326          DO 19 I=1,MS
927           N=I+MBP
328          DO 19 J=1,NS
929           M=J+NBP
930          P1(I,J)=CONST*P1(I,J)
931          PC(N,M)=P1(I,J)
932       19 CONTINUE
333          CALL PLT3D1(CST,MP,CETERM,NP,PC,ALP,BETA,F,TTL,SIZE,WK,IDN,KX,KY,N
334         1KXY,LINES)
335    C
936      430 CONTINUE
337    C
338    C
939    C     PLOT HERE
340    C     RETURN TO MAIN LOOP
341    C
942          GO TO 50
943      500 CONTINUE
344          DO 501 I = 1,MS
345          DO 501 J = 1,NS
946          P1(I,J) = 0.0
347      501 CONTINUE
948          P1(MS,NS) = 1.0
349          GO TO 401
950    C
```

```
351    C    FINAL TIME REACHED
352    C
353       210 CONTINUE
354          WRITE(6,211) TIME, FTIM, L
355       211 FORMAT(// 5X, 'COMPUTED TIME ', F10.3, 5X, 'INPUT FINAL TIME ',
356          1 F10.3, 5X, '= OF LOOPS TO REACH FINAL TIME ', I5 //)
357          DO 215 I =1,L
358          WRITE(6,213) VMB(I), VNB(I), VO(I), VARX(I), VARY(I), TIM(I)
359       213 FORMAT(2X, 12F10.5)
360       215 CONTINUE
361       650 FORMAT('1          ')
362          WRITE(6,650)
363          CALL PLOTP(TIM,VMB,L,0)
364          WRITE(6,650)
365          CALL PLOTP(TIM,VARX,L,0)
366          WRITE(6,650)
367          CALL PLOTP(TIM,VNB,L,0)
368          WRITE(6,650)
369          CALL PLOTP(TIM,VARY,L,0)
370          STOP
371          DEBUG SUBCHK
372          END
```

80

```
1     C
2     C    THIS PROGRAM CALCULATES THE STATE PROBABILITIES FOR THE EQUAL
3     C    ATTRITION RATE COEFFICIENT SOLUTION (EARCS).
4     C    A  3-D PLOT IS PRODUCED USING THE VERSATEC PLOTTER.
5     C
6          IMPLICIT REAL×8  (A-H,O-Z)
7            CALL ERRSET (208,256,10,1)
8          DIMENSION C (50,50),M (50),N (50),F (50),PTMN (50,50)
9          REAL×4 SIZE (2),FL (2),WK (41,41,3),X (41),Y (41),P (41,41)
10         DIMENSION KX (100),KY (100)
11         LOGICAL×1 IDN (41,41)
12         REAL×8 TTL (12)/12×'          '/
13         READ (5,100) MO,MBP,NO,NBP
14         READ (5,101) A
15         READ (5,102) TIME
16          READ (5,103) (F (I),I=1,41)
17    C
18    C    F (I) =1/I-FACTORIAL.   DONE TO SPEED UP THE PROGRAM
19    C
20         WRITE (6,802) MO,MBP,NO,NBP,A,TIME
21      802 FORMAT ('  ',4I5,2F10.5)
22         MO=MO-MBP
23         NO=NO-NBP
24         MO1=MO+1
25         NO1=NO+1
26         MBP1=MBP+1
27         NBP1=NBP+1
28         MBP2=MBP+2
29         NBP2=NBP+2
30         RMO=MO
31         RNO=NO
32         DO 10 I=1,41
33         DO 10 J=1,41
34         C (I,J) =0.0
35         PTMN (I,J) =0.0
36          P (I,J) =0.0
37      10  CONTINUE
38         C (MO1,NO1) =1.0
39         DO 20 I=2,MO
40         J=MBP+I
41         C (J,NO1) = RNO×× (MO-I+1)
42      20  CONTINUE
43         DO 21 I=2,NO
44         J=NBP+I
45         C (MO1,J) = RMO×× (NO-I+1)
46      21  CONTINUE
47         DO 22 I=2,MO
48         MC=MO1-I
49         MM=MO1-I+1
50         MPLUS=MM+1
```

81

```
51           DO 22 J=2,ND
52           NC=NO1-J
53           NN=NO1-J+1
54           NPLUS=NN+1
55           C(MM,NN)=NC*  C(MPLUS,NN)+MC*   C(MM,NPLUS)
56        22 CONTINUE
57     C
58     C END OF COEFFICIENT CALCULATION
59     C
60           F1=-A*TIME
61           DO 25 I=MBP2,MO1
62           DO 25 J=NBP2,NO1
63           IJ=I+J
64           K=MO+NO-IJ +2
65           F2=(1.0-DEXP(F1))**K
66           KK=K+1
67           IJ=IJ-2
68           F3=DEXP(F1*IJ)
69           PTMN(I,J)=F2*F3*C(I,J)*F(KK)
70        25 CONTINUE
71       100 FORMAT(4I5)
72       101 FORMAT(F10.5)
73       102 FORMAT(F10.5)
74       103 FORMAT(D17.11)
75     C
76     C FOR NBP<N<NO
77     C
78           DO 30 II=1,ND
79           NFORCE=NBP+II
80           J=MO+NO-MBP-1-NFORCE
81           FACT=MBP+1.0+NFORCE
82           SUM1=(1.0-DEXP(F1*FACT))/( A*FACT)
83           SUMINT=SUM1
84           DO 301 K=1,J
85           FACT=FACT+1.0
86           ADDFAC=(-1.0)**K
87           FRACTN=(1.0-DEXP(F1*FACT))/( A*FACT)
88           COMBT=1.0
89           DO 302 KJ=1,K
90           RKJ=KJ
91           COMBI=(J-RKJ+1.0)/RKJ
92           COMBT=COMBT*COMBI
93       302 CONTINUE
94           SUMINT=SUMINT+ADDFAC*FRACTN*COMBT
95       301 CONTINUE
96           NMBP=J+1
97           NBOUND=NFORCE+1
98           PFAC=A*NFORCE*F(NMBP)*C(MBP2,NBOUND)
99           PTMN(MBP1,NBOUND)=PFAC*SUMINT
100       30 CONTINUE
```

```
101     C
102     C FOR MBP<M<MO
103     C
104           DO 40 II=1,MO
105           MFORCE=MBP+II
106           J=MO+NO-NBP-1-MFORCE
107           FACT=NBP+1.0+MFORCE
108           SUM1=(1.0-DEXP(F1*FACT))/( A*FACT)
109           SUMINT=SUM1
110           DO 401 K=1,J
111           FACT=FACT+1.0
112           ADDFAC=(-1.0)**K
113           FRACTN=(1.0-DEXP(F1*FACT))/( A*FACT)
114           COMBT=1.0
115           DO 402 KJ=1,K
116           RKJ=KJ
117           COMBI=(J-RKJ+1.0)/RKJ
118           COMBT=COMBT*COMBI
119     402   CONTINUE
120           SUMINT=SUMINT+ADDFAC*FRACTN*COMBT
121     401   CONTINUE
122           MNBP=J+1
123           MBOUND=MFORCE+1
124           PFAC=A*MFORCE*F(MNBP)*C(MBOUND,NBP2)
125           PTMN(MBOUND,NBP1)=PFAC*SUMINT
126      40   CONTINUE
127           DO 45 I=MBP1,MO1
128           DO 45 J=NBP1,NO1
129           K=I-1
130           L=J-1
131           WRITE(6,801)K,L,PTMN(I,J)
132     801 FORMAT(' P(T,', I5,',',I5,') = ',D17.11)
133      45 CONTIN'E
134     C
135     C DATA ADJUSTMENT FOR PLOT
136     C
137           NROW=41
198           NCOL=41
199           NKXY=100
140           LINES=0
141           ALPHA=15.
142           BETA=30.
149           FL(1)=0.0
144           FL(2)=0.0
145           SIZE(1)=6.0
146           SIZE(2)=8.0
147     C
148     C SCALING
149     C
150           PMAX=PTMN(1,1)
```

83

```
151          DO 50 I=1,41
152          X(I)=I
153          DO 50 J=1,41
154          Y(J)=J
155          IF(PTMN(I,J).GT.PMAX)PMAX=PTMN(I,J)
156       50  CONTINUE
157          CONST=8.0/PMAX
158          DO 51 I=1,41
159          DO 51 J=1,41
160          P(I,J) = SNGL(CONST*PTMN(I,J))
161       51  CONTINUE
162   C
163   C
164   C IF  OTHER FORCE LEVELS CHANGE PLOT ARGUMENTS
165   C
166          CALL PLT301(X,NROW,Y,NCOL,P,ALPHA,BETA,FL,TTL,SIZE,WK,
167        *              IDN,KX,KY,NKXY,LINES)
168   C
169   C  EXPECTED VALUES AND  VARIANCES
170   C
171          EM=0.0
172          EMM=0.0
173          VARM=0.0
174           SPROB=0.0
175          DO 60 II=MBP1,MO1
176          I=II-1
177          SPT=0.0
178          DO 601 JJ=NBP1,NO1
179          SPT=SPT+  PTMN(II,JJ)
180       601  CONTINUE
181          EM=EM+I*SPT
182          EMM=EMM+ I*I*SPT
183          SPROB=SPROB+SPT
184       60 CONTINUE
185          VARM=EMM-EM*EM
186          EN=0.0
187          ENN=0.0
188          VARN=0.0
189          DO 70 II=NBP1,NO1
190          I=II-1
191          SPT=0.0
192          DO 701 JJ=MBP1,MO1
193          SPT=SPT+  PTMN(JJ,II)
194       701  CONTINUE
195          EN=EN+I*SPT
196          ENN=ENN+ I*I*SPT
197       70 CONTINUE
198          VARN=ENN-EN*EN
199          WRITE(6,805) EM,EN,VARM,VARN
200       805 FORMAT(' ','EXPECTED VALUES M . N'.   50X,' VARIANCE M.N './
```

```
201          *' ',D17.11,10X, D17.11,T51,D17.11, 10X, D17.11)
202          WRITE(6,1100) SPROB
203    1100 FORMAT(' SUM OF PROBABILITIES ',D17.11)
204          STOP
205          END
```

85

LIST OF REFERENCES

1. BILLARD, L., Stochastic Lanchester-Type Combat Models I, Naval Postgraduate School, NPS 55-79-022, 1979.

2. BILLARD, L., Calculation of State Probabilities for a Stochastic Lanchester Combat Model, Naval Postgraduate School, NPS 55-79-029, 1979.

3. BROWN, R. H., A Stochastic Analysis of Lanchester's Theory of Combat, OpRes. Office, The John Hopkins University, ORO-T-323, AD82944, 1955.

4. CLARK, G. M., The Combat Analysis Model, Ph.D. Thesis, Ohio State University, 1969.

5. CRAIG, J. D., The Effect of Uncertainty on Lanchester-type Equations of Combat, M.S. Thesis, Naval Postgraduate School, 1975.

6. ISBELL, J. R. and MARLOW, W. H., "Attrition Games", Naval Res. Log. Quarterly, v. 3, p. 71 to 94, 1956.

7. LANCHESTER, F. W., "Aircraft in Warfare: The Dawn of the Fourth Arm-No.V., The Principle of Concentration", Engineering, v. 98, p., 1914.

8. SEVERO, N. C., "A Recursion Theorem on Solving Differential-Difference Equations and Applications to some Stochastic Processes", J. Appl. Prob., v. 6, p. 673 to 681, 1969.

9. SPRINGALL, A., Contributions to Lanchester Combat Theory, Ph. D. Thesis, Virginia Polytechnic Institute, Blacksburg, Virginia, 1968.

10. TAYLOR, J. G., Lanchester-Type Models of Warfare, to appear.

11. WEISS, H. K., Lanchester-Type Models of Warfare, Proc. First International Conference on Operational Research, M. Davis, R. Edison, T. Page (Editors), ORSA, Baltimore, Maryland, 1957.

INITIAL DISTRIBUTION LIST

		No. Copies
1.	Defense Technical Information Center Cameron Station Alexandria, Virginia 22314	2
2.	Library, Code 0142 Naval Postgraduate School Monterey, California 93940	2
3.	Department Chairman, Code 55 Department of Operations Research Naval Postgraduate School Monterey, California 93940	1
4.	Professor J. G. Taylor, Code 55Tw Department of Operations Research Naval Postgraduate School Monterey, California 93940	1
5.	Professor G. F. Lindsay, Code 55Ls Department of Operations Research Naval Postgraduate School Monterey, California 93940	1
6.	Captain Dieter Klemm 70-17 Forest Ridge Road Monterey, California 93940	2

DATE
ILMED
—8